


Converter for 3D Viewer

CV3

Quick Start Guide

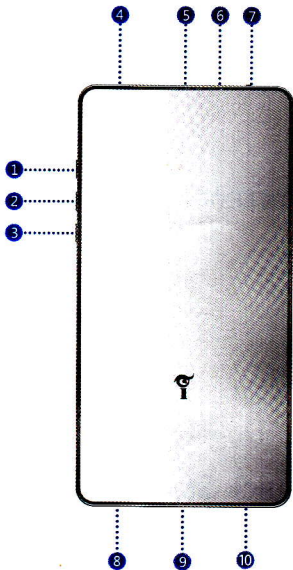

- ① Volume Up
- ② Volume Down
- ③ 2D/3D Selection
- ④ Headphone Jack
- ⑤ Viewer Connection Port
- ⑥ Power On Indicator
- ⑦ On/Off
- ⑧ DC Input
- ⑨ AV-IN
- ⑩ Charging Indicator

- Signal: CVBS(PAL/ NTSC/SECAM)
- Display: 2D/3D
- Battery: 900mAh, 3 hours' charging time (max)
- Adapter: Input: AC 100-240V 50/60Hz
Output: DC 5V 1000mA
- Power On Indicator: White LED on
- Charging Indicator: Red LED on while charging
Green LED on when charging completed
- Applications: Work with any display module or viewer