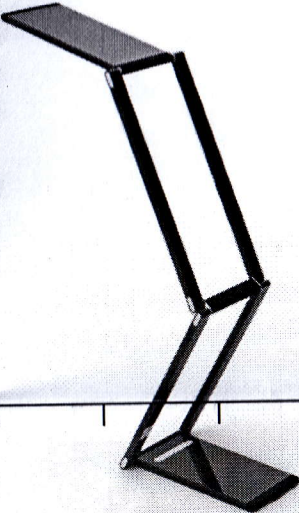





ULTRATHIN LED TABLE LIGHT							
Product Parameters							
Operating Voltage	AC220V/AC110V						
Power Efficiency	≥90%						
Power Factor	0.85						
System Power	5W						
Luminous Efficacy of Lights	95LM/W						
Luminous Efficacy of LED	130LM/W						
Initial Luminous Flux of Lights	420LM						
Dimming Range	Touch induction dimmer 5%-100%						
Desktop maximum intensity of illumination	800LX						
Temperature of Junctions(TJ)	<40℃						
Peak Lighting Angle	>160°						
Color Temperature	4000K						
CRI	Ra85/Ra96						
Lighting Source	Nichia-Japan						
Working Environment	Between-30℃~+45℃, 10%~90%RH						
Storage Temperature	Between-20℃~+30℃						
LED life span	>50000 Hours						
Body and shell materials	Aluminum Alloy-Aviation						
Product Size(mm)	185*86*14mm						
Dimensions (mm)	242*125*68mm						
Net Weight	0.9Kg						
IP Protection Grade	IP23						
Quality Assurance /Warranty	1 years						