


# NINJA

## Instruction manual

Thank you for purchasing NINJA Power Bank, please read the instruction manual carefully before using.

N0111

Product function diagram

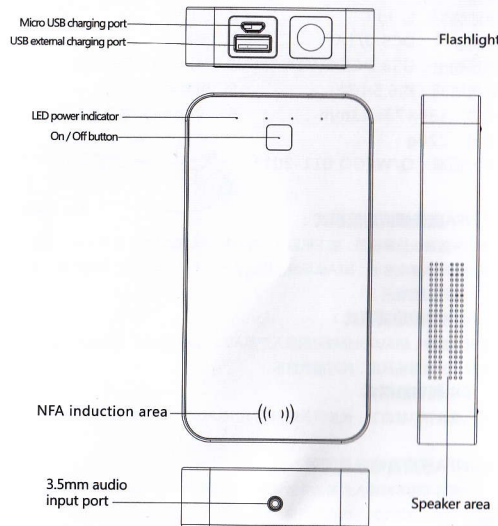


1


N0111

Charge other devices

1. Check the battery: Press the ON/OFF button, there are four blue LED indicator display power; when power is low (when one blue light work), please charge power bank in time before use.
2. Please unplug the built-in Micro charging cable on the left side, connect the Micro port with input port of mobile phone or digital products; press the start button to begin charging for mobile phone or digital products.
3. If the phone or digital products charging input port is inconsistent (such as iPhone, iPad and other digital products), should use the corresponding adapter; connect the USB port of charging cable with output port of power bank, the other end of the adapter to connect the input port of device which need charged, press the start button to charge the device.
4. After fully charged, the device display in full charged status, please pull out the connecting device in time.



Keep one end of USB charging cable connect with output port of power bank, the other end of the cable to connect with device which need charged, and then press the switch button to begin charging. (As shown below):

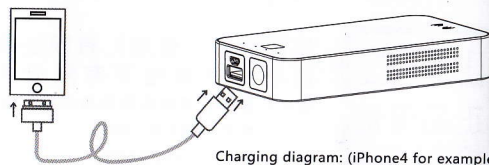

Charging diagram: (iPhone4 for example)

4

N0111

Product features

Can be used for a variety of devices (as shown below):



1. Suitable for most model of mobile phones and can be used as power supply in digital products with DC5V input
2. Product itself built-in one standard Micro charge cable that can be compatible with most mobile phones and digital products, plug the charging.

- Built-in overcharge, over discharge protection IC, Accurate and safety
- Intelligent chip power management scheme, stable and efficient.

### Usage tips:

1. Please fully charge this product for using first time;
2. When using this product, please open screen of electronic device, make sure the charging connection identifier displays correctly in order to ensure normal operation of the product.
3. In the process of charging for electronic devices, it need timely charge this product when power is low.
4. After electronic devices fully charged, please unplug the connection cable, to avoid power loss.
5. This machine has large charging current, you must use more than 1A adapter to charge for power bank, less than 1A may cause damage for adapter.
6. When this machine under charging, please do not charge for cell phone or other equipment in case not reduce the battery life.

5

N0111


Technical parameters and Operating method

### • Technical parameters

Capacity : 5200mAh/3.7V  
Battery: Li-ion  
Input : DC5.0/1A  
Output : USB:DC5.0V/1A  
充电时间: 约6.5小时  
Size : 136×73×23mm  
Weight : 220g  
Standards of performance:  
Q/WEGO 011-2013

### • Parts list

1. The main machine
2. Instruction manual
3. Warranty card
4. Micro USB charging cable
5. Audio cable
6. iPhone charging head(Optional)



Cell phone placement diagram

### 1. NFA magnetic field induction function mode

When playing music or video with a phone, press the product ON/OFF button to open NFA induction speaker, put the phone speaker closer to the NFA induction area, NFA magnetic field induction function start work, you can hear the music from amplifier. (Operation is shown in Figure)

### 2. AUX playing mode

Gently press the ON/OFF button, connect the AUX cable between AUX IN port and electronic equipment phones output port, turn on the music, the product start working.

### 3. Flashlight function mode

Under the status of power off/on, long press the ON/OFF button for 3 seconds, the flashlight LED light on, again press 3 seconds, the flashlight LED put out.

**Some problem should be pay attention when use this product:**  
NFA induction effect different while use different device, part of the cellphone unable closer to the speaker due to speaker structure NFA induction area may impact actual effect. Part of the cellphone possible impact NFA induction effect due to inner antenna or current interference. If you want excellent audio experience, please use 3.5mm audio cable connect the input device, for example cellphone, tablet PC.

2

N0111

Charge for Power Bank

### 1. Charge for Power Bank

#### • Method 1:

Charge with USB power adapter, connect built-in Micro USB charging cable with input port of power bank, USB port connected with adapter; Blue LED light lit means charging begins, the corresponding light indicator flash successively; four indicators becomes long light after fully charged.

#### • Method 2:

Charge with computer USB output port, connect built-in Micro USB charging cable with input port of power bank, USB port connected with computer USB output port; Blue LED light lit means charging begins, the corresponding light indicator flash successively; four indicators becomes long light after fully charged.

#### • Method 3:

Charge with car USB port, connect Micro USB charging cable with input port of power bank, USB port connected with car USB output port; Blue LED light lit means charging begins, the corresponding light indicator flash successively; four indicators becomes long light after fully charged.

### 2. Power display

In order to know the real power status of power bank, you can press the power button; Blue LED lights display power as: four blue LED light indicates the remaining capacity 75%~100%; Three blue LED light indicates the remaining capacity 50%~75%; Two blue LED light indicates the remaining capacity 25%~50%; One blue LED light indicates the remaining capacity 0%~25%; When on blue LED flash means the power runs out and needs charging.

### 3. Charge tips

When charging, four LED light flashing regularly; all LED indicator becomes blue after fully charged; Charging capacity shows as below

Power ratio	0%~25%	25%~50%	50%~75%	75%~100%
Indicator status	●○○○ One light lit	●●○○ Two light lit	●●●○ Three light lit	●●●● Four light lit

3

# NINJA

(Warranty card)

N0111

1. The warranty period is 12 months from the date of Ex-factory.
2. During the warranty period, for the material and workmanship defects, will be freely repaired and provided with replacement parts, all replaceable parts owned by our company.
3. During the warranty period, repair products detected by our maintenance staff confirms fault occur under normal use, we will provide free repair.
4. During the warranty period, the following situation can not enjoy our free maintenance service:
  - Damage to surface coatings and appearance.
  - The user doesn't follow the instructions, improper installation, storage and use to cause fault or damage.
  - Due to unexpected factors, human reason, environmental factors (such as: operational errors, bump, handling, unreasonable voltage supply, moisture) cause fault or damage.
  - Irresistible fault or damage caused by natural disasters (earthquakes, fires, tsunamis).
  - Product packaging and accessories.
5. We can not provide any warranty and maintenance services for following circumstances:
  - Products are not manufactured by our company.
  - Products are not sold in formal channel in mainland China.
6. For out of warranty (with warranty card and purchase invoice), we offer a paid service.

Wego Electronic Hong Kong Co., Ltd. Add: Room 1302, Block A, Haisong building.  
Shenzhen Wego Electronic Co., Ltd. Fax: 0755-23932589 Hotline: 400 855 6388

**NINJA Power Bank**  
CONFORMITY CERTIFICATE

WEGO

NINJA

# NINJA

保修卡

N0111

- 感谢您购买妮佳移动电源产品！
- 我们将根据保修条款，确认您的购买凭证后给予保修服务，请您妥善保管此保修卡。
- 在申请维修时请您出示购买凭证及保修卡。
- 为了您能够及时获得技术支持服务，在遇到故障后，请联系所购买产品的经销商，我们将统一保修。

请您如实填写以下资料信息：

客户姓名：			联系电话：		
购买地区：	省	市（地区）	县		
产品型号：				购买日期	
故障描述：					

### 重要事项

1. 用户必须在购买产品后以中文正楷填写用户信息栏，并加盖经销商印章。
2. 送修产品时，用户必须出示保修卡。
3. 送修服务只限于我们的售后中心进行，不提供上门维修服务。
4. 送修产品的双程运费及运输保险由用户自行承担。
5. 我司不承担任何事故及事故产生的无限连带责任，包括人员及财产损失，只对购买产品的用户提供因质量问题所产生故障的产品进行免费维修或替换。
6. 我司保留本保修条款之解释权，并保留对本条款修改之权利，无需另行通知。

经检验该产品符合技术标准，准予出厂。

产品名称：（妮佳）移动电源

产品型号：N0111

合格：



深圳市炜高电子有限公司