

Thank you for purchasing the MINIX NEO X8-H Plus.

The NEO X8-H Plus transforms any conventional TV or LCD monitor with a HDMI connection into a SMART TV / SMART PC. Fully equipped with Android™ 4.4 OS (KitKat) the NEO X8-H Plus brings the complete Android experience to the big screen; offering web browsing, XBMC, 4K2K UHD video playback, Full 1080p HD streaming, Internet radio, gaming and much more.

XBMC MINIX Edition comes pre-installed on the NEO X8-H Plus, with full hardware decoding support. This exclusive edition delivers the optimum XBMC experience on Android™.

More hints, tips and useful information can be found on the official MINIX Forum:  
[www.minixforum.com](http://www.minixforum.com)


## Specifications

Processor	Quad-Core Cortex A9r4 Processor
GPU	Octo-Core Mali-450 GPU
System Memory	2GB DDR3
Storage	16GB eMMC - SD/MMC Card Reader
OS	Android™ 4.4 OS (KitKat)
Connectivity	802.11ac Dual-Band Wi-Fi (2.4GHz/5.0GHz), Gigabit Ethernet, Bluetooth 4.0
External Antenna	Dual-Band Antenna
USB	3 x USB 2.0 Ports, 1 x Micro-USB OTG port
Video Output	HDMI™ 1.4, up to 4K @ 30fps
Audio Output	Via HDMI™ 1.4, 3.5mm stereo jack, optical SPDIF
Supported Video Format	DAT/MPEG/MPE/MPG/TS/TP/VOB/ISO/AVI/MP4/MOV/ 3GP/FLV/MKV/M2TS/MTS/M4V/WMV/ASF/RM/RMVB
Supported Audio Format	DD/DD+/MP2/MP3/WMA/WAV/OGG/OGA /FLAC/ALAC/APE/AAC
Misc.	MINIX NEO A2 Lite
Dimensions	128x128x20mm

## Contents




MINIX NEO X8-H Plus




MINIX NEO A2 Lite




Dual-Band Antenna



Power Adapter



HDMI Cable




USB Cable




OTG Cable

## Overview

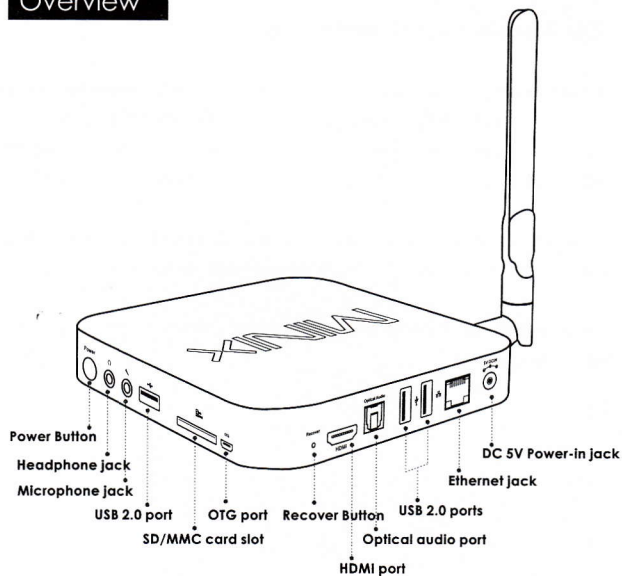

## Overview

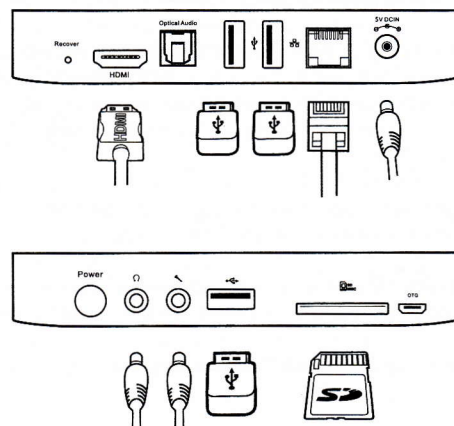

## Overview

**IR Receiver** - Compatible with Logitech Harmony

**Power LED** - The LED glows blue when the NEO X8-H Plus is on.

**Power button** - To power on the NEO X8-H Plus, press and hold the power button for 1-2 seconds until the power LED glows. To power off the NEO X8-H Plus, press and hold the power button and the display will prompt out the power off options, select OK to confirm your choice. Alternatively, hold the power button for 8 seconds to force power off.

**SD/MMC card slot** - Increase the storage size or read files directly from a SD/MMC card, supports up to 64GB max.

**Recovery button** - The recovery button is to be used together with the OTG port when connecting to a PC for service/manual upgrade purposes.

**Earphone Jack** - Connect to an external audio output device such as earphones etc...

## Overview

**Microphone Jack** - Connect to a microphone for voice input.

**Ethernet Jack** - Connect the Ethernet cable for internet access. If you need advanced settings such as VPN, go into the settings page at: "Settings" > "More...". While connected with the Ethernet cable, the NEO X8-H Plus can be used as a router and also a Wi-Fi hotspot; if you need to use the Wi-Fi hotspot feature, please make sure that the Wi-Fi feature is OFF before you enable the Wi-Fi hotspot service at: "Settings" > "More".

**DC 5V Power-in Jack** - Connect the 5V power adapter supplied in the package to this port. The NEO X8-H Plus requires less than 1A to operate, however the included power adapter provides 3A, in consideration that you may require extra to connect other power-drawing external devices such as an external hard drive.

**USB 2.0 Ports** - Connect an external USB device to the NEO X8-H Plus, such as USB flash drive, receiver of wireless keyboard and mouse, USB wired mouse, receiver of wireless headset, MINIX branded air-mouse / gyro-mouse etc...

## Overview

**HDMI port** - Connect the NEO X8-H Plus to the HDMI port of a high-definition TV or PC monitor using an HDMI cable.

**Optical Audio Port** - Connect to the optical audio input of an external sound processing unit, such as an amplifier.

**OTG Port** - Connect the micro end of the Micro-USB cable to this port and the other end to the computer for synchronization and manual upgrade purposes. This port also serves as an extra USB port while using with the Micro-USB OTG cable bundled in the package.

## Control

**Different Control Methods** - You may control the NEO X8-H Plus with the following input devices:

- 1.) Remote Control App. for Android smartphones and tablets, more information can be found at [www.minix.com.hk](http://www.minix.com.hk)
- 2.) Wired mouse;
- 3.) 2.4GHz USB wireless mouse and keyboard set;
- 4.) 2.4GHz USB air-mouse / gyro-mouse (MINIX branded mouses sold separately).
- 5.) MINIX NEO A2 Lite (included).

## Basic Setup

### What you need:

**High-Definition TV or PC monitor** - That can display 720p, 1080p or 4K video with at least one HDMI input.

**HDMI Cable** - To connect the NEO X8-H Plus to your TV (HDMI cable included).

**Wireless Network** - A wired network cable or an 802.11ac Wi-Fi wireless network, your wireless network name and password.

**Software and accounts** - To play content (videos, photos, music) from a smartphone or PC on the NEO X8-H Plus you will need:

- A UPnP/DLNA software pre-loaded on your smartphone or PC.
- A Google account to sign-in to Google Play Store to download the corresponding applications (e.g. iMediaShare, eHomeMediacenter) necessary for streaming the content from a smartphone or PC.
- Other accounts may be required for full access to some internet contents.

## Basic Setup

The MINIX NEO X8-H Plus connects to your TV or PC monitor through an HDMI port that delivers both audio and video. Before you setup the NEO X8-H Plus, look at the ports on the side/back of your TV or PC monitor to ensure you have the right cable:

- HDMI cable: You can connect the NEO X8-H Plus to a HDTV or home theater receiver that has a HDMI port, using the HDMI cable for video and audio.

### Step 1: Connecting the cable

1. Connect one end of the HDMI cable to the HDMI port of your TV / PC monitor.
2. Connect the other end of the cable to the HDMI port of the NEO X8-H Plus.

### Step 2: Connecting the power

- Connect the 5V power adapter supplied in the package to the relevant port. Press and hold the power button for 2-3 seconds to power on the NEO X8-H Plus, the blue power LED should then glow.

### Step 3: Turn on your TV / PC monitor and select the input

- Simply turn on your TV or PC monitor and select the corresponding HDMI port connected to the NEO X8-H Plus.

## Basic Setup

### Language Setup

You may choose the desired system language by following these steps:

**Launcher Home Screen > Settings > Language & Input > Language**

The default language is English, you may choose your desired language and confirm.

### Time Zone Setup

You should adjust the time zone according to your current location by the following steps:

**Launcher Home Screen > Settings > Date & Time > Select Time Zone**

Choose your time zone and confirm.

### Wi-Fi Setup (basic)

To connect to your wireless network follow these steps:

**Launcher Home Screen > Settings > Wi-Fi > Check the option**

**"To see available networks turn Wi-Fi on"**

Wi-Fi will turn on and automatically scan the wireless networks available, then select the wireless network that you wish to connect to and confirm, key-in the password of the Wi-Fi network when the virtual keyboard prompts, finally hit the "Connect" button.

## XBMC

XBMC is a media player that allows users to play and view most videos, music, such as podcasts from the internet, and all common digital media files from local and network storage media.

The NEO X8-H Plus comes pre-installed with XBMC MINIX Edition, with full hardware decoding support. This exclusive edition delivers the optimum XBMC experience on Android.

For more information and instructions regarding setup please visit: [www.wiki.xbmc.org](http://www.wiki.xbmc.org)

## Google Play Store

Sign-in to your Google Account.

Launch the Google Play Store by the following steps:

**Launcher Home Screen > Google Play Store, select and confirm.**

To use the Google Play Store you will need a Google Account. If you already have a Google Account, select "Sign in" and login with your Google Account. If you don't have a Google Account yet, select "Get a Google Account" and complete the rest of the process.

Upon completion of the sign-in process you will be brought to the Google Play Store, allowing you to download and install the applications you want. Alternatively, if you cannot find the application you need on the Google Play Store because of language restriction, location restriction or other reasons; you may look for and download the application files in the form of ".apk" from the internet and install them through the "ApkInstaller", which is pre-loaded in the system.

No part of this guide, including the products and software described in it, may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any means, except documentation kept by the purchaser for backup purposes, without the express written permission of MINIX. This clause does not apply to such software which is licensed under the General Public License ("GPL") or other Free Open Source Licenses. Copies of the respective license terms, and where required an offer to provide the respective source code, are included in the product.

Google, Android, Gmail, Google Maps, Chrome, Google Play, YouTube, Google+, and other trademarks are property of Google Inc. A list of Google trademarks is available at <http://www.google.com/permissions/guidelines.html>. MINIX and the MINIX logo are trademarks of MINIX Tech. All other marks and trademarks are properties of their respective owners.

The content of this guide may differ in some details from the product or its software. All information in this documentation is subject to change without notice.

For online help and support, please visit [www.minix.com.hk](http://www.minix.com.hk), or join our facebook fanpage at: [www.facebook.com/minixtech](http://www.facebook.com/minixtech)



Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help. Modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment under FCC rules.