


Instructions for I5 Minicomputer

Precautions


1. Please use built-in external power 5V 2.5A adapter of original computer. Do not connect with any other power source to avoid mainboard burnout.
2. When connecting with HDMI, do not connect or unplug HDMI line after starting the computer. It must be connected before starting computer and TV to prevent from TV burnout.
3. Do not simultaneously connect HDMI and VGA, unless you are proficient in computer setting, and separate connection with one of them will be more convenient for your use.
4. It is normal if the surface of chassis is relatively heated when using. Computer without fan employs chassis for heat dissipation, with its surface temperature same as that of CPU and it is normal if human hand feels heated, which brings no impact on machine stability and life. Please feel relieved to use

Please pay attention to the computer interface when using, with corresponding equipment and connection accessed successively

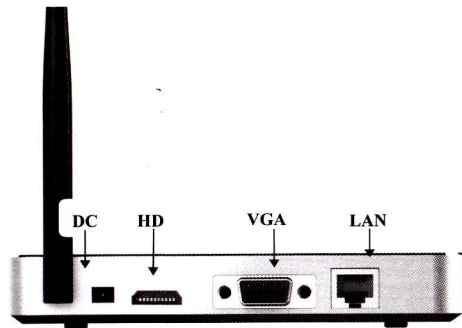

1. On the chassis has obvious logo, use the USB keyboard or mouse, keyboard or use wireless keyboard is more convenient, directly plugged into the back of the USB interface can be automatically identified
2. The backend interface is: the string mouth, display interface, VGA or HDMI, power supply interface, if you use HDMI voice automatically output to the TV, don't have to pick up computer speakers. When using the VGA to connect SPK interface by computer speakers sound again. All linked by later switch power supply, switch is located in the front small button
3. If you want to use WIFI, please tighten the random antenna to the fuselage joint on copper, screws into solid
Set screw fixed so far tighter good contacts.

As shown in figure, the front button to switch, holes for the boot after power light

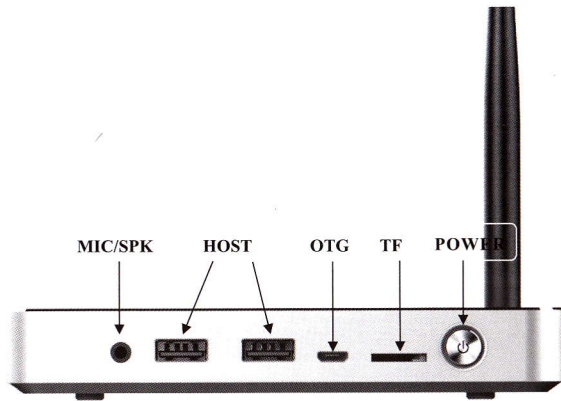

Use after period of time if you feel too much junk files, the problem such as slow, you can Try to reinstall system. At the same time we have ghost more than 32 gb solid-state disk configuration system. A key to restore to the original pure system. If your machine has a ghost, tend to have a WORD file on the desktop, ghost instructions. Open the method is right automatically reinstall into pure system

If you don't want to use this system, also can reinstall another system, you can use U disk to start install themselves again, U disk can be made of cabbage startup disk. If it is a CD installation, an external USB drive. Do you want to buy the corresponding accessories

Installation process from the U disk or start from the light, as long as the press F11 immediately when turned on the computer, can appear boot menu selection,

select the U disk or drive you want to start the return can again. Below is only two options, if you access to the U disk, U disk will appear in the list below, use of the keyboard direction arrow keys to select your U disk can from U disk PE to start the installation system

If you want to set to boot into the BIOS Settings interface is just boot immediately press F11, such as choosing the most a Enter Setup below to access the BIOS Settings interface. The following figure

