


2.4G Mini Wireless Keyboard With Touchpad

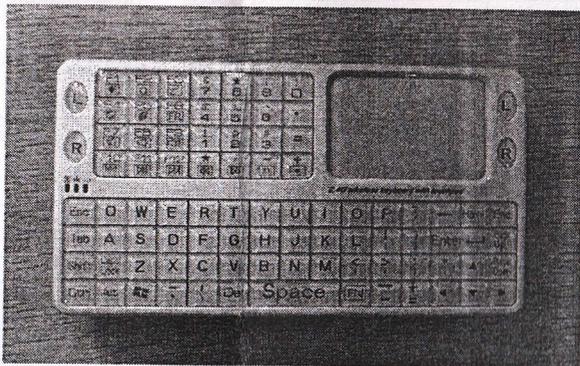

User Manual

Product Features:


1. 2.4G wireless transmission with 6-10 meters' remote controlling distance
2. With two L/R mouse keys on both sides, easy to control
3. Handy keyboard with backlight LED and touch pad
4. With the receiver adapter equipped inside , it's portable to carry
5. Fast Windows Multi-media Control Keys
6. Fast Windows shutdown,sleep,Internet Explorer and Outlook function
7. Built-in rechargeable lithium-ion battery
8. The touchpad adopts the capacitance transducing technology with the same function with the PC touchpad
9. 85 full-funtion keys

System Supports:


Windows 98, 2000, XP, Vista , Windows CE/Windows 7, MacOS 10.x or lower generation, Linux(Debian-3.1 Redhat-9.0 Ubuntu-8.10 Fedora-7.0 tested) with USB port

Product Picture:

Front Panel:

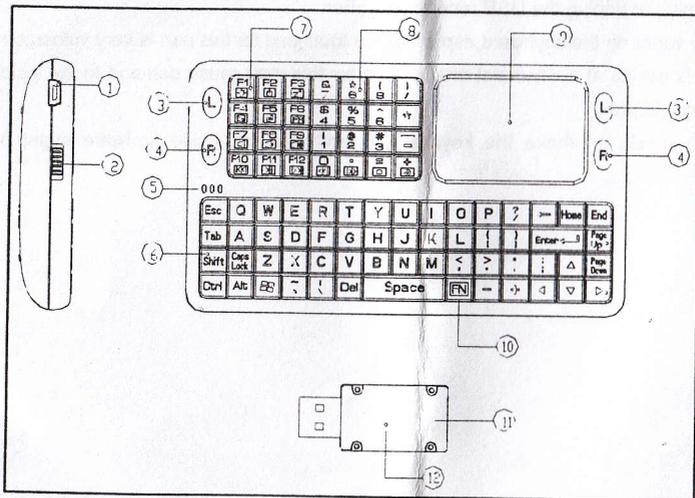

Back Panel:

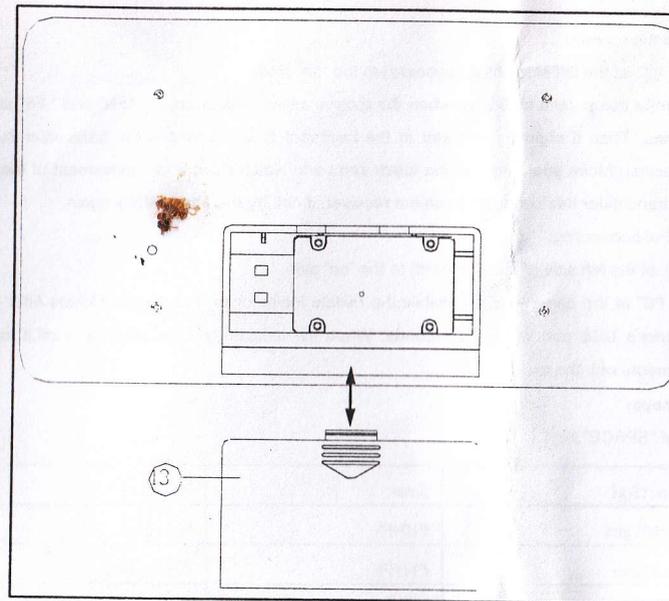

No.	Function
1	Mini USB charging port
2	on/off switch
3	Left mouse key
4	Right mouse key
5	Indicator: Caps indicator, shooting indicator, charging indicator
6	Keyboard
7	Functional keys
8	Numeric keys
9	Touchpad
10	FN key
11	Wireless Receiver (at the backside of the keyboard)
12	Receive indicator
13	Back Panel cap

● **Operation Instructions:**

● **Start at the first time:**

1. Connect the transmitter to the receiver.

- (1) Push the "on/off" key (Ⓜ, at the left side of the keyboard) to the "on" side.
- (2) Plug the receiver into the computer's USB port. when the receive indicator is on, push "FN" and " F6" at the same time within 10 seconds. Then if shooting indicator in the keyboard is off, it means the transmitter successfully connect with the receiver. Move your finger at the touch zon and watch if there is movement of the cursor on the screen. If so, the transmitter has connected with the receiver; if not ,try the above steps again.

2. Another operation method of connecting:

- (1) Push the "on/off" key (Ⓜ, at the left side of the keyboard) to the "on" side.
- (2) Then push " FN" and " F6" at the same time. Meanwhile, the middle indicator on the keypad flickers. After that, plug the receiver into the computer's USB port within 10 seconds. When the indicator on the receiver is off, it means the transmitter successfully connects with the receiver.

● **The functions of all the keys:**

- (1) FN key (at the right side of "SPACE" key)

Name	Function	Name	Function
F1+FN	Backlight	F10+FN	Previous
F2+FN	Shutdown	F11+FN	Broadcast/ Pause
F3+FN	Sleep	F12+FN	Next
F4+FN	Outlook	0+FN	Fast forward
F5+FN	Internet Explorer	. +FN	Fast reverse
F6+FN	Conncting	=+FN	Pause
F7+FN	Mute	++FN	Voice recorder
F8+FN	VOL-		
F9+FN	VOL+		

Primary Keys

The operation and function of the primary keys are the same with the QWERTY keyboards.

● **Technical Parameters:**

- Size: 135*75*15.5mm
- Weight: 103g
- Temperature Requirement: -10℃ -- +55℃
- Battery: built-in lithium-ion battery
- Standby time: 500 hours
- Remote Operation distance: 6-10 meters
- Modulation: RF adopting DSSS mode with stronger anti-jamming capability
- Transmitting Power: Max+ 2dBm
- Working Voltage: 3.3V
- Working Current: < 40mA
- Charging Voltage: 4.2V - 5.05V
- Charging Current: < 400mA
- Sleep Current: < 1mA

● **Toubleshooting:**

Symptom	Reason of the Symtom	Solution
Receiver cannot be connected	The switch is not "on"	Turn the switch to the "on" position
	USB receiver is not installed well	Plug the USB receiver again, after well-installed, try to connect again.
	The battery is out of electricity	Charge the keyboard
	Connecting too long time	Finish the connecting in 10 seconds
The remote operation distance is too short	PC system doesn' t fit the keyboard	Choose the system which the keyboard supports
	The battery is out of electricity	Charge the keyboard
Keyboard cannot work	No electricity, the keyboard is power off to protect itself	Charge the keyboard
Cannot be charged	The power adapter doesn' t fit the keyboard	Choose the right power adapter
	USB charging cable doedn' t work	Change a new USB cable

● **Caution:**

To insure the lifespan of this product, please follow the below instructions:

- Please charge the battery for continuous 12 hours for the first time
- Don't charge the battery too often
- Please don't plug or unplug the USB receiver too often
- Don't pull any water on the keyboard, especially the touchpad for this part is very vulnerable
- Do not put this device at dusty, moist or hot place for this may cause damage to the inside electronic circuit boards.
- Do not drop, knock, or shake the keyboard violently for the inside firmware might be damaged.