

ATTENTION

1. Please read this manual carefully before using it.
2. To ensure stable power supply, please use good supply line and outlet with grounding.
3. Please use the power supply indicated on the projector and the wire provided with the projector.
4. Please do not dismantle the projector without authorization; otherwise the supplier bears no responsibility for maintenance service.
5. Do not look into the lens while the projector is on working to prevent eyes from hurting.
6. Do not place the projector on the articles which may become obstacles for ventilation.
7. This projector has no waterproof function; you need to keep it away from water. And vessels with water should not be placed around it.
8. To avoid electric shock, please keep the projector from rain and dampness.
9. Please shut off the projector and unplug the wire if the projector will not be used for a long time.
10. When the projector is transported, please use the plastic foam and other anti-shock materials provided with the projector.
11. If the projector is found to be damaged, please do not try to repair by yourself and please contact the distributor.

*** This manual is for reference only. If you have any question, please contact the distributor.

1、 Production files

◆ Product Features	-----15
◆ Specifications Parameter	-----16
◆ Fittings	-----16

2、 User Guide

◆ Connection	-----17
◆ Function Operating	-----19
◆ Menu Operation	-----20
◆ Remote Control	-----22

1. Product Profiles

1.1 Product Features

- 1 All sealed design, release you from daily internal cleaning;
- 2 Using of the 20 thousand hours long life RBG-LED lamp, which makes it more colorful and abundant details.
- 3 Electronics zooming function and free image size setting.
- 4 Professional trouble shooting and protection design.
- 5 Optical trapezium adjustment function, picture proportion is not distortion after adjustment.
- 6 Mode shift freely.
- 7 Low noise design and dust free design, free you from internal cleaning.
- 8 Image rolling function support upwards and downwards installing
- 9 Power consumption lower to 24W.
- 10 Multi input interface:AV,VGA,USB, SD, HDMI vehicle power supported
- 11 Mini USB slot, could connect with power bank (note:must be 2A power bank).

1.2 Specification

Model NO.	Mini Projector	Image System	TFT LCD
Input terminal	AV, VGA, USB, SD, HDMI, MicroUSB	Support Resolution	1920*1080
Lamp	LED	Voltage input	12V-2.5A/5V-2V
Menu Language	Chinese/English . . .	Brightness	80LUMEN
Contrast	500:1	Lens	F=125
Projection size	30-120inches	Projection Distance	1.07-3.31meters
Color	16770K	Power waste	30W
Speaker	2 x (8Ω2W)	Weight	0.5KG
Size	170x143x70CM	Operation model	Manual & Remote control
Working Temp.	-10°C —28°C	Biggest support memory card	32G
System	Multimedia(Android Matching)	Trapezium adjustment	+ -15 hand adjustment


1.3 Fittings



Please check if the fitting is complete before you buy this projector:

Remote control	1pc	User Manual	1pc
Power adaptor	1pc	warranty card and QC card	1pc
3 in 1 cable	1pc		

2.USER GUIDE

2.1 Connection

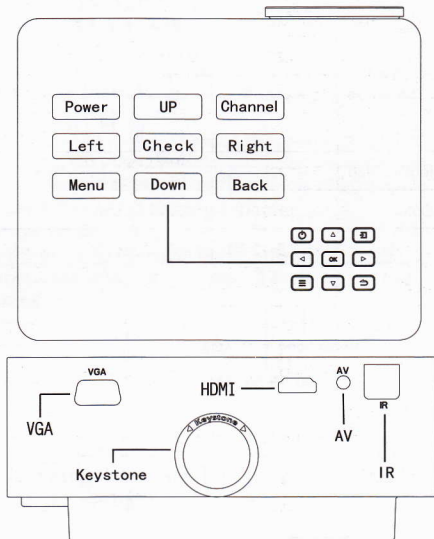

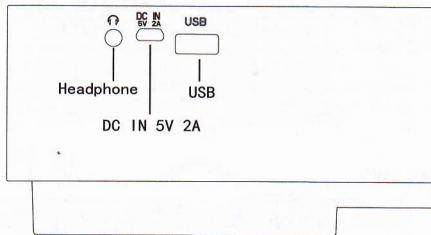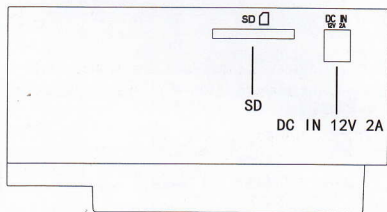

2.2 Function operation

2.2.1 Switch-on and off

After powering through the power adaptor, then projector is under standby status.

Switch on: Press the power button or the power button on the remote control once, and then the projector is powered on.

Switch off: When you want to shut the projector, please press the power button beside the indicate light or the power button on the remote control once, and then the projector is off.

2.2.2 Image focus


Place the projector vertical to the projection screen, and then rotate the lens slightly, until the brilliant image presented.

Attention:

Please connect the power adapter with the projector first, then plug the socket into the outlet. Finally power on the projector..

2.3 Menu Operation

A. Signal source selection




Press signal input selection button on the remote control or input button on the projector, then press up or down button to select the signal source you need, use OK or enter to confirm.

B. Sub-menu adjustment




Press "MENU" enter into the main menu, press "◀/▶" button to choose "picture" "sound" "Clock" or "setting" menu to adjust the parameters you need.

c. USB menu

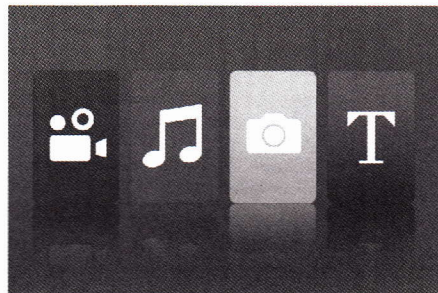

After you have choose Media signal source, the interface change to the above picture, and then you can play correspondent files through "photo", "music", "movie", "text" icon by the projector accordingly..

2.4 remote control

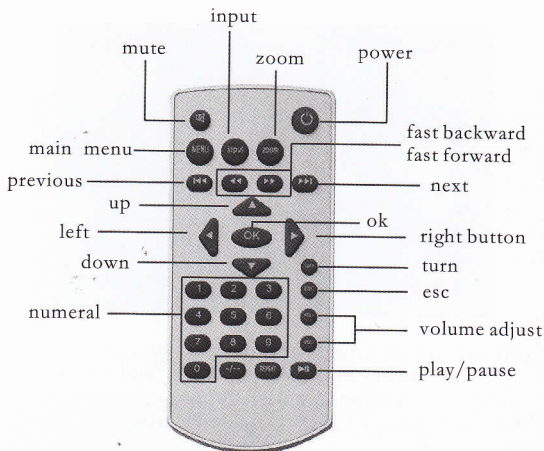

Don't use the new and old battery at the same time in remote control, otherwise power shortage and will affect remote control use. please pick the battery out if no use for long time. when operating remote control, please make sure that the signal emission of the remote control aims the infrared receiving interface of projector.