


# QUICK GUIDE TO THE WIRELESS KEYBOARD



## Installing the wireless keyboard

1. Slide the iPhone into the wireless keyboard at an angle.





2. Gently press the opposite edge of the iPhone down to securely snap it into the wireless keyboard.




## Initial Setup

1. On the iPhone, SELECT settings-bluetooth and set the Bluetooth to "ON" to search for nearby devices.



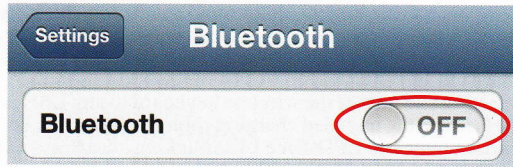

2. On the wireless keyboard, slide the power switch to the "ON" position.
3. Activate the Bluetooth pairing button with a small reset pin or tool-a blue LED light will be lit on the wireless keyboard.

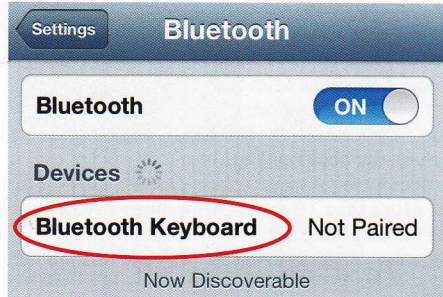

4. "Bluetooth Keyboard" will appear on your iPhone as one of the Bluetooth devices available.
5. Select "Bluetooth Keyboard". A notification will appear prompting the password to pair the wireless keyboard with your iPhone.
6. Enter the password on the wireless keyboard, then press "enter".



*Congratulations! Your iPhone 6 is now successfully paired with the wireless keyboard.*

## Getting to know your wireless keyboard



□ Main screen/Esc

◀◀ Prev Track

⚙ Brightness -

🔒 Lock screen

▶▶ Play/pause

⚙ Brightness +

✕ Delete

▶▶ Next Track

🌞 Backlight switch

⌘ Command

fn Function

🖖 Virtual Keyboard

fn-combination key, press FN key can input the blue characters above on the keyboard or control the blue keys.

1. 📶 -Wireless pairing button- Use a small needle like thing press this key to activate search mode.
2. Power Switch - Slide the Power Switch to turn your wireless keyboard On and Off.
3. Charging Port - Connect the wireless keyboard to any USB power source through the included charging cable to charge the keyboard
4. Connection indicator LED-Blue LED blinking means system in connection pair state.
5. Battery indicator LED-green LED Blinking means the keyboard battery electric quantity is low, please charge the keyboard; The LED light will turn green when it is fully charged.
6. Charge indicator LED -The LED light is red when it is charging.


## Backlight description

1. Turn on the power switch, the system to detect the hardware, and the backlight will have flash light.
2. When connect with the iphone, Press the pairing button, the backlight turn be light automatically. In the process of connection, if the backlight be shutdown, can press the pairing button turn on the backlight again.
3. After connect with iphone, press fn+🌞 key can turn on the backlight; More than 10 seconds, without any key press of words, the backlight be shutdown automatically.
4. Text input state, suggest using FN keys to turn on the backlight.

5. The backlight only turn on in the correct process of connection with iPhone. When the Bluetooth closed or shutdown, the keyboard will enter intelligent save electricity state the backlight is in shutdown.

## Charging the battery

1. For the first time user, Please charge the keyboard for at least 6 hours before using it. Thereafter, charge for at least 2 hours when the battery runs low.
2. Connection Charging Cable.



## Quick trouble shooting tips

If the keyboard is not working with the iPhone make sure:

1. Check power switch on the wireless Keyboard
2. The Bluetooth function on the iPhone is enabled.

3. The passkey is entered correctly.
4. Reboot iPhone - Hold home button and sleep button for 5 seconds.
5. Make sure your iPhone has sufficient charge.
6. Make sure Airplane mode is turned off.
7. Battery which built-in keyboard in low power station, please charge it.

## Product Specifications

- Bluetooth Specification: Version 3.0
- Range of Frequency: 2.4GHz Spectrum
- Operating Voltage: 3.7Vdc ( Li-ion )
- Standby Current: 1 mA
- Operation Current: < 2.5 mA
- Sleep Current: < 0.25 mA

This device complies with Part 15 of the FCC Rules:  
Operation is subject to the following two conditions:  
1. This device may not cause harmful interference and  
2. This device must accept any interference that is received,  
including any interference that may cause undesired operation.