


CAR REAR VIEW CAMERA

User's Manual




Easy To Install
Waterproof Housing
Up and Down is active
Built-in Navigation Line



Specification:

Image Sensor: Color CMOS
Signal System: NTSC/PAL
Min. Illumination: 0.2Lux
Horizontal resolution: 380TVL
Effective Pixels Number: NTSC: 510(H) × 492(V); PAL: 628(H) × 582(V)
Scanning Frequency: NTSC: 15.734KHz(H)/59.94Hz(V); PAL: 15.625KHz(H)/50Hz(V)
Sync. System: Internal
Scanning System: 2:1 Interlace
Video Output Level: Composite: 1.0Vp-p, 75Ω, Unbalanced
Electronic Shutter: 1/60~1/1500sec Auto 1/50~1/1500sec Auto
Gamma Correction: 0.45
S/N Ratio: 40dB
White Balance: Auto
Supplied Voltage: DC12V
Compact Zina Alloy Die Cast Body
Wide Angle up to 175 degree (Optional)

Dimension(mm)&Wiring

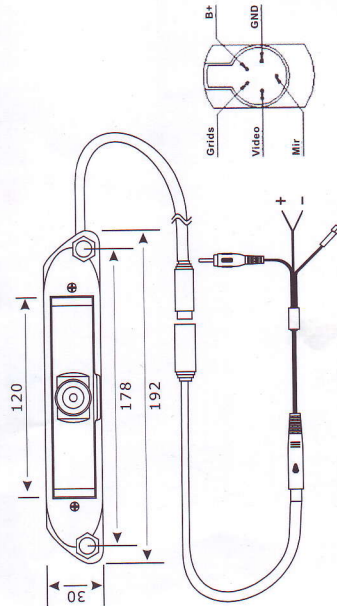

Mirror the switch cut over