

## Guarantee

- We provide a period of one year quality assurance services from the date of products purchased. We will provide repair and replacement services for quality problem.
- Products for Repair and replacement must be within the warranty period. Cost of transporting for product maintenance should be paid by customer.
- Quality assurance applies only to the initial purchase customers.
- In condition of Maintenance and modification without authorization, accident, misuse and deliberate damage. This quality assurance is no valid.
- In terms of quality assurance, Company has the responsibility to limit maintenance and replacement of finished products.
- If you need warranty service, be sure to send the product to our customer service center or dealer.

warranty period		one year
Purchase date	date	month year
warranty period		
customer address:	customer name	
	tel:	
contact person:	Name	
	Agents	
	Tel:	

Before consultation with service products, please read the instructions carefully.  
Please describe the practical problems of product accurately .


Imager	1/3" 1/4" SONY CCD	1/3" 1/4" SHARP CCD	1/3" 1/4" CMOS
Lens mount	1/3": 4.9mm(H)*3.7mm(V) 1/4": 3.6mm(H)*2.7mm(V)		
Lens mount	PAL		
Effective pixels	500(H)*582(V)		628(H)*582(V)
Horizontal resolution	420-480TVL	420TVL	380TVL
S/n ratio	50Hz		
Electr onic iris	1/50-1/100,000 sec		
Electr onic iris	0.45		
S/n ratio	More than 48db		
Video output	1Vp- p 75ohm		
Electr onic iris	1 LUX		
	OFF		
Power source	DC 12V	DC 9V	
Oper atin g temp	0T -20C до +50C		

# USER MANUAL



## Monitor

- Remote controller indicator lamp
- Power
- Mode
- Quick select way 1
- Quick select way 2
- Quick select way 3
- Quick select way 4

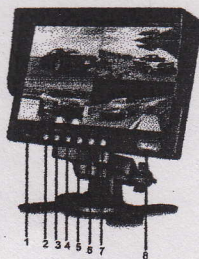


### Warn

Please close or move the monitor while driving  
Special announcement  
LCD Monitor may happened to have some bright point while array displaying, it proved to be normal phenomenon by array display technique.

### Attention


Please read the whole introduction before operation  
Guard against damp  
Prevent the CD surface ripped by any hard tool  
Do not remove the cover or maintain the camera without authorization

## Remote controller

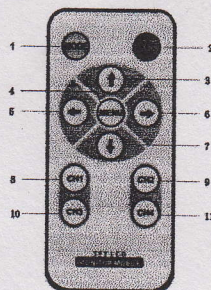

- Display mode
- Power
- Up
- Menu
- Add
- Reduce
- Down
- Quick select way 1
- Quick select way 2
- Quick select way 3
- Quick select way 4

## CONNECTION

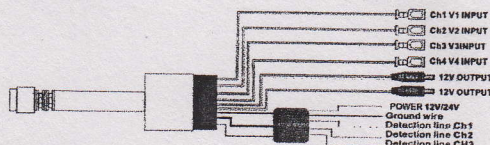

## Specification

- Size
- Resolution:480\*....., Synchronize display 4CH
- Power supply
- 4 channel video input
- 4 channel video input requires PAL/NTSC at the same time.
- Mode: full screen, 4 CH quad, 2 CH quad
- OSD, remote control