



# User Manual

## Capacity 1000mAh battery cover case

for SAMSUNG Galaxy SII i9100




Before installing and using the product, please read the instructions thoroughly, and retain them for future reference.

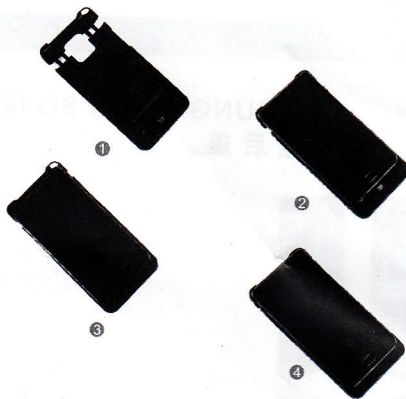

## USE



1. Slide your SAMSUNG Galaxy SII i9100 into the power case and make sure SAMSUNG Galaxy SII i9100 is well connected to 30 pin dock connector on the power case.
2. ON/OFF switch, press the on/off switch for longer time (3-5second) to activate or stop the charging, see the SAMSUNG Galaxy SII i9100 screen to identify the charging signal.
3. Battery level, press on/off switch once to check how many juice left, see below indication  
1LED  $\leq$  25%    2LED  $\leq$  50%  
3LED  $\leq$  75%    4LED  $>$  75%

cover thickness  
4.4mm

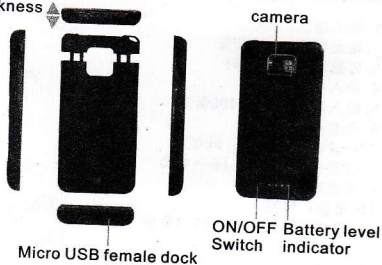

## Charge&sync

Charging/sync ,simply plug in the USB turn micro USB to the micro USB female dock,connect the USB to a powered USB equipment or computer.

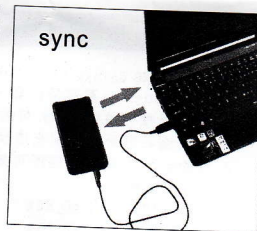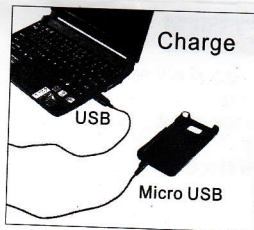


## Specifications


1. Output Voltage:5V
2. Output Current :750mAh
3. Capacity:1000mAh
4. input Voltage:5V
5. input Current:100~400mAh
6. Cell type:Lithium-polymer battery
7. Cycle life:500times
8. Operating Temperatur:-10~+45
9. DC Charging Time:4hours
10. Weight:50g
11. Dimension(mm) :135.8x69x15.1mm

# 说明书

## SAMSUNG Galaxy SII i9100 电池后盖



安装使用该产品之前,请仔细阅读说明,并保留作日后查看。

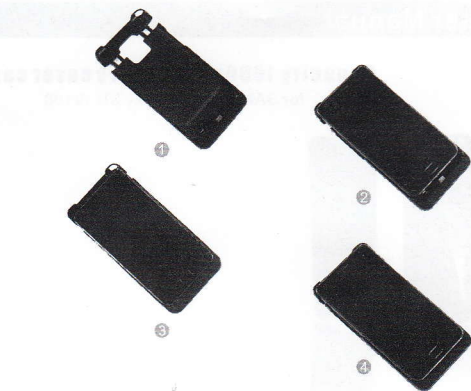

将电池后盖安装至 SAMSUNG Galaxy SII i9100 以全面保护

### 充电&同步电脑

充电及同步电脑,简单的将USB电线一端插入MICRO USB接口,另一端接入电源或电脑即可进行充电或同步软件。

### 使用说明

1. 将 SAMSUNG Galaxy SII i9100 装入充电外壳中,确保与30-pin基座接口紧密对接。
2. 开关,长按开关3-5秒,可激活充电或停止充电,观看屏幕以辨别充电状态。
3. 容量显示灯,按开关即可知晓剩余电量,如下显示:  
1个灯≤25%    2个灯≤50%  
3个灯≤75%    4个灯>75%

壳外层厚度  
4.4MM



Micro USB 端口

摄像头



开关 电池容量显示灯



充电



同步

### 详细规格

1. 输出电压: 5伏
2. 输出电流: 700毫安
3. 容量: 1000毫安时
4. 输入电压: 5伏
5. 输入电流: 100~400毫安
6. 电池: 锂电池
7. 可循环充电次数: 500次
8. 适宜操作温度: -10~+45°C
9. 直充时长: 4小时
10. 重量: 50克
11. 尺寸: 135.8x69x15.1毫米