

Modle NO: E07

User Manual



Warning:

Please don't look at the lens when the LED start to work, especially children, in order to prevent the eyes, be damaged due to the strong brightness of the projector.

Please fix screws in the TF card slot well for preventing swallowing small devices such as TF Card, especially for children.

Chapter One Product Features:

This projector adopts the TFT projection technology, with high power white light LED and audio and video playback function.

Brilliant color, cartoon design for children, and beautiful shape and artful design, all are suitable for playing cartoon and fairy tales for children education.

LED Light Source:

High Brightness LED; lamp life: 20000 hours

Flexible Use:

Except standard front projection, this projector can realize rolling-over and rear projection quickly through menu selection.

The justification range of projection screen size is 10 to 60 inch

Flexible Use:

Please use the projector in a careful and right way. Avoid touching the lens.

Because of the unique Sequential switching characteristics of liquid crystal, under the condition of uncoordinated contrast and brightness, the screen will have a little luminance edge, and it belongs to a normal phenomenon

Imaging lens are high precision optical devices. To avoid injury, please do not touch with hands directly and avoid collision! When the machines are not in use for a long time, please cover with the lens so as to avoid accidental injury of lens.

Please place the projector at the level of the desktop because projector will be turned over on uneven desktop and may cause damage to the projector.

Avoid long time exposure to direct sunlight or high temperature place because this will cause damage or reduce the service life of the projector. Please do not place the projector near heat sources, such as, radiator, heater or other heating equipment, Avoid direct sunlight.

Users should avoid use in wet, high temperature, vibration, dust, radiation and other bad environment, and move gently.

When the machine is working normally, the environmental temperature is normal temperature.

When the environment temperature is too high, black spot occurs and becomes larger and larger in the image center during playing. Please shut down timely to prevent damage to the liquid crystal.

Avoid exploring projector to the rain, water, high humidity or temperature place. Do not close to places near water.

In order to avoid the internal damage of the machine, please shut down, when in thunderstorm, lightning and voltage fluctuations. And wait for 3 minutes to unplug the power adapter plug.

Chapter Three Packing List:

The projector x 1
The power adapter x 1
AV line x 1
The remote control x 1
The specification x 1


Chapter One Product Features:

| | | |
|---------------------|---------------------|---------------------------------------------------|
| Optical parameters: | Technology Type | Single LED Panel Display Technology |
| | Resolution | 640*480 Pixels |
| | Support Resolution | 1092*1080, HD 1080P |
| | Brightness | 100 lumens |
| | Contrast | 800:1 |
| | Optical parameters | the original aspect ratio of 4:3, 16:9 compatible |
| | Displayable Color | Full color {1.67 millions} |
| | Projection Method | Front, Rear, Ceiling projection |
| | Projection Lens | Manual Focus |
| | Keystone Correction | automatic |
| Optical Elements: | Shot Size | 70-80 inch |
| | Optical Elements | Projection Distance: 1M - 3M |
| | Lighting | 30W LED Bulb |
| | Lamp Life | 20000 hours |
| Input/output: | Audio | *1xAV |
| | | *1xUSB |
| | | *1xmini SD card |
| | | *1xVGA |
| | | *1xHDMI |
| | Video | *1xEF |

Chapter Five Basic Information of Products:

| | | |
|---------------------|-----------------------|-------------------------------------------------------|
| Optical parameters: | The OSD Menu Language | Chinese, English, Russian, French, Spanish and German |
| | External dimensions | 200*160*70mm |
| | Weight | 1.2kg |
| | Power Requirements | AC110-240V/50-60Hz |
| | Basic Information | total power: 50W |
| | Operating Temperature | 0-40C/32-104F {0-1500m} |
| | Operating Humidity | 20-90%RH |
| | Storage Conditions | 20-90%RH |

Chapter One Product Features:

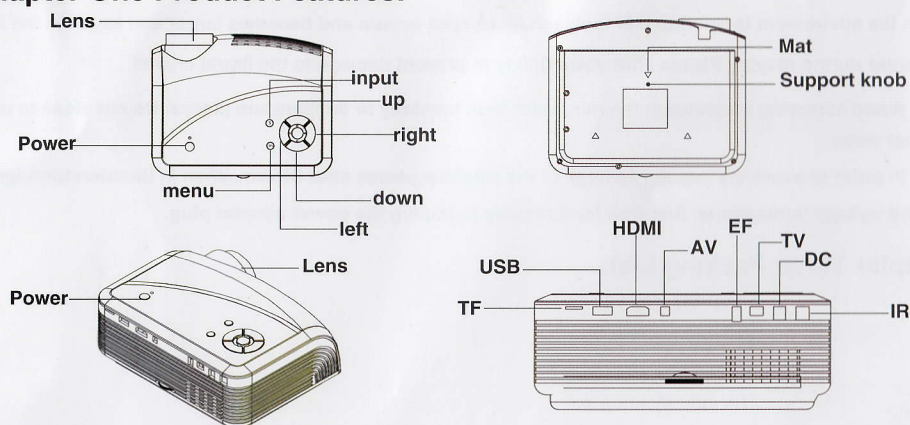

TF Card

TF Card Insert > select signal key > select to play the file, The operation signal > select required mode of object file

USB

Insert U disk > to select the desired mode > confirm > select object file

HDMI


Connect the HDMI > signal > select HDMI

AV

Connect AV cable > signal > confirm > Insert into the corresponding interfaces according to color

Audio output: 3.5mm

Chapter Seven The Remote Controller Button Functions:

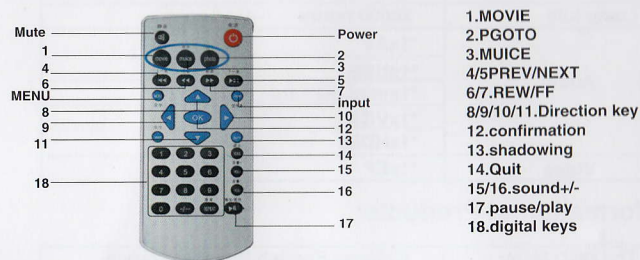

Chapter Eight Function Operation:

Switch on/off machine

Preparation: when the projector is connected to power supply through a power adapter, the red indicator light at the top of the fuselage is displayed, and the projector enters into the standby mode.

Start the projector: press the power button beside the indicator light at the top of the fuselage more than 3 seconds, the indicator light being on, the projector enters normal working state.

Close the projector: press the power button beside the indicator light at the top of the fuselage more than 3 seconds. the lights go out, the projector is off.

Image focus

According to the different distances between projector and screen or projection wall, this projector can project different inch images. After startup, put the product vertical opposite to the projection wall or screen, and then rotate the lens to focus, until the image is clear.




start up and enter into this screen, then press the select key, select relative mode, and the presenter.



1. Press the menu button to enter this screen, and then press the left key to select the parameters you need: the image mode, the choice of language, the sound pattern. to select the parameter

2. Operate as what you need.



press INPUT to select the signal sources.

Product Warranty:

One year warranty includes machine and lighting; Prohibit unauthorized disassembly and normal disassembly; otherwise no longer enjoy free warranty service.