



# MINI CCD DIGITAL CAMERA

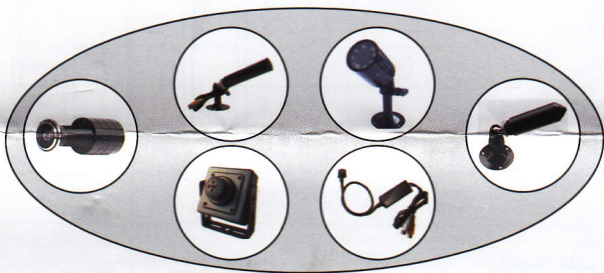

CCTV SYSTEM

## CONNECTORS AND CONTROLS

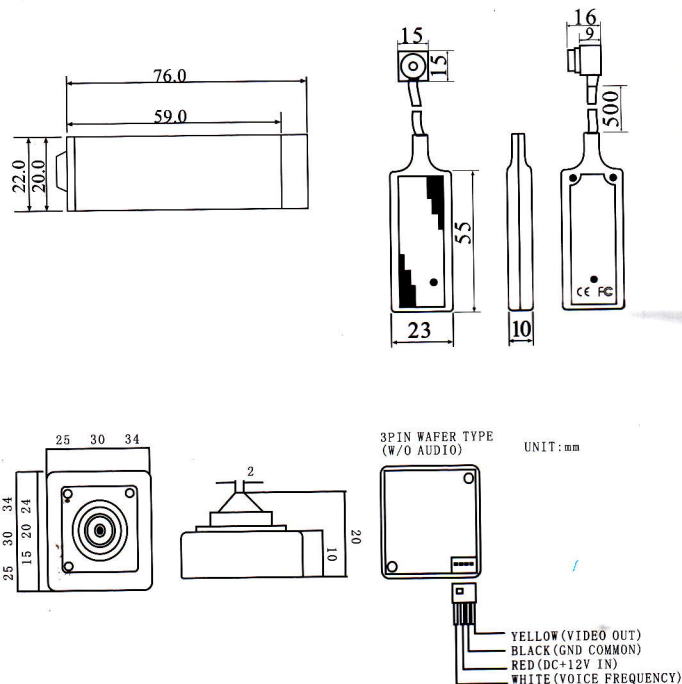

## SPECIFICATIONS:

MODEL	Color					Black and White	
Image Sensor	1/4sharp CCD	1/3sharp CCD	1/4sony CCD	1/3sony CCD	1/3sony CCD	1/3B/W CCD	
TV System	PAL/NTSC					EIA/CCIR	
Horizontal resolution	420TV Lines			540TV Lines	600TV Lines	700TV Lines	
Picture Elements	NTSC:510X492(H), PAL:500*582(V)						
S/N Ratio	≥48dB						
Y characteristic	0.45						
Usable illumination	1 Lux	0.5 Lux	0.01 Lux	0.001 Lux	0.1 Lux	0.5 Lux	
Sync system	Internal synchronization						
Electronic shutter time	Auto, NTSC:1/60-1/100,000Sec PAL:1/50-1/100,000Sec						
Scanning system	NTSC:525Lines, 60Field/Sec PAL:625Lines, 50Field/Sec						
Video out put	1Vp-p75ohm						
Operation temp	-20℃ +65℃ RH95%Max						
AGC	On/Off						
BLC	On/Off						
Power supply	DC12V/80mA						
Dimension							
Lens	2.5mm 2.8mm 3.6mm 3.7mm 6mm 8mm 12mm						

### **Brief of product:**

Products of this are high-quality cameras  
Designed for closed-circuit surveillance. we adopt the  
Latest Japanese technology of sensor and driver. Their  
Characteristic are high clear, strong anti-jamming, rich  
And realistic color, high stability, and widely applicable to  
Indoor, outdoor, day and night, automotive rear view etc  
Moreover they have small volume, lightweight, high  
Integrative level, easy and convenient fit and use.

### **Brief of product:**

The shell adopts high-quality material of aluminum.  
(High hardness)

The surface uses high preservative adhesive force.  
(Acid resisting)

All interface use airtight.

(Fit to use on outdoor and rainy seasons)

It settles the problem, which is ordinary radiator of.

Pickup camera

(work steady)