

※MANUAL OF CAMERA※

Features:

Wireless transmission and reception, small size, light weight, low power consumption, high sensitivity, easy installation & operation, easy to connect.

Operation instructions:


1. Twist the receiver antenna into the receiver;
2. Connect the receiver to the monitor with AV cable;
3. Plug the DC 12V 500MA adaptor into the power jack of the camera;
4. Insert the DC 9V 500MA adaptor into the receiver to the required position;
5. Adjust the frequency controller on the receiver to the best position, mount the camera with screws.
6. Adjust the lens of the camera to the best position, shop, department store, clothes shop, workshop, warehouse, school, office and home.

Functions:

Suitable for facilities in the supermarket, shop, department store, clothes shop, workshop, warehouse, school, office and home.

Attention:

The person who uses this product to peep, shoot and undertake other illegal activities, will be punished.

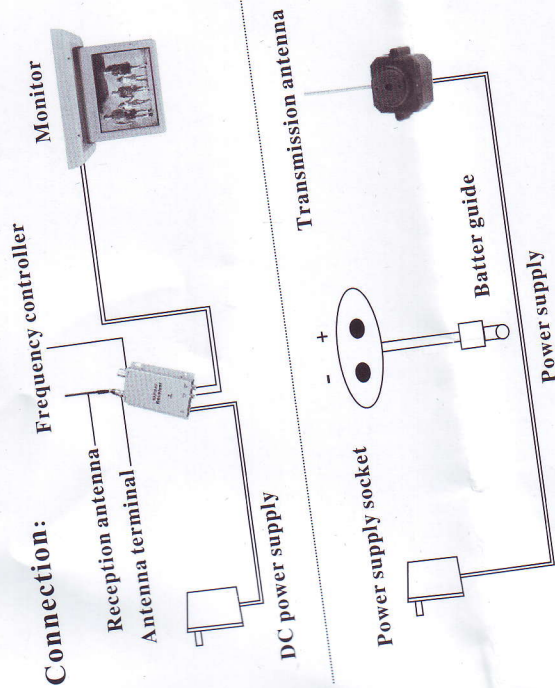

Specifications:

Image sensor	1/3 1/4 inch CMOS
Signal system	PAL/CCIR NTSC/EIA
Horizontal resolution	380 TV lines
Scan frequency	PAL/CCIR: 50Hz NTSC/EIA: 60Hz
Min illumination	3 LUX
Transmission power	50mW
Transmission frequency	1.2G/2.4G
Transmission power supply	DC 9V
Receiving frequency	1.2G/2.4G
Demodulation mode	FM
Antenna	50ohm SMA
Receiving power supply	DC 12V