

✧MANUAL OF CAMERA✧

Features:

Wireless transmission and reception, small size, light weight, low power consumption, high sensitivity, easy installation & operation, easy to connect.

Operation instructions:

1. Twist the receiver antenna into the receiver;
2. Connect the receiver to the monitor with AV cable;
3. Plug the DC 12V 500MA adaptor into the power jack of the receiver;
4. Insert the DC 9V 500MA adaptor into the power jack of the camera;
5. Adjust the frequency controller on the receiver to the required position;
6. Adjust the lens of the camera to the best position, mount the camera with screws.



Functions:

Suitable for facilities in the supermarket, shop, department store, clothes shop, workshop, warehouse, school, office and home.

Attention:

The person who uses this product to peep, shoot and undertake other illegal activities, will be punished.

Connection:

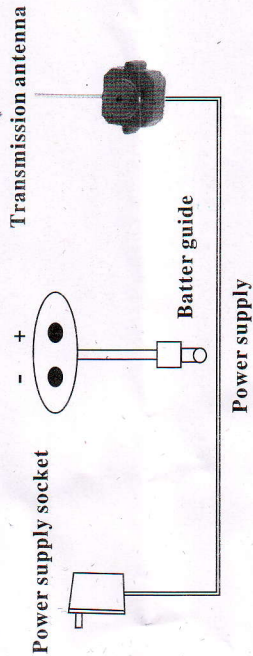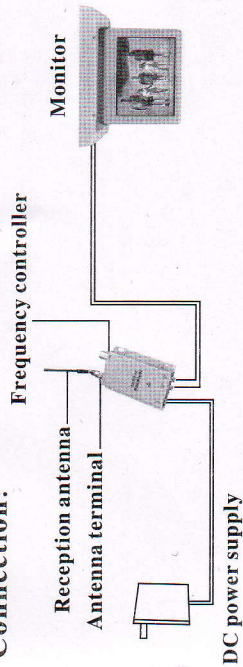

Specifications:

Image sensor	1/3 1/4 inch CMOS
Signal system	PAL/CCIR NTSC/EIA
Horizontal resolution	380 TV lines
Scan frequency	PAL/CCIR:50Hz NTSC/EIA:60Hz
Min illumination	3 LUX
Transmission power	50mW
Transmission frequency	1.2G/2.4G
Transmission power supply	DC 9V
Receiving frequency	1.2G/2.4G
Demodulation mode	FM
Antenna	50ohm SMA
Receiving power supply	DC 12V