


SUMMARY

The bedroom projection TV is designed especially for bedroom viewing. It comes with delicate appearance and multi functions like audio and video playback, games and entertainment.


- 1) Built-in smart Android 4.4 operation system, freely to install any application.
- 2) Built-in dual-band WiFi. Support 2.4 GHz / 5 GHz WiFi signal reception, easy access to full WiFi area, more stable.
- 3) Built-in Bluetooth 4.0 module. Connect to Bluetooth devices like speaker, earphone, mouse, keyboard etc freely without cable.
- 4) Support mobile phone control and multi screen interaction. Available wireless protocol: DLNA, AirPlay, Miracast, WiPico.
- 5) Built-in 2600mAh Li-ion battery, can charge for mobile phone and other devices.
- 6) Compatible to all major devices. Rich interface: HDMI/MHL, USB, USB OTG, audio output.
- 7) Built-in 4G high speed storage.

PRODUCT VIEW


Product view




PRODUCT VIEW

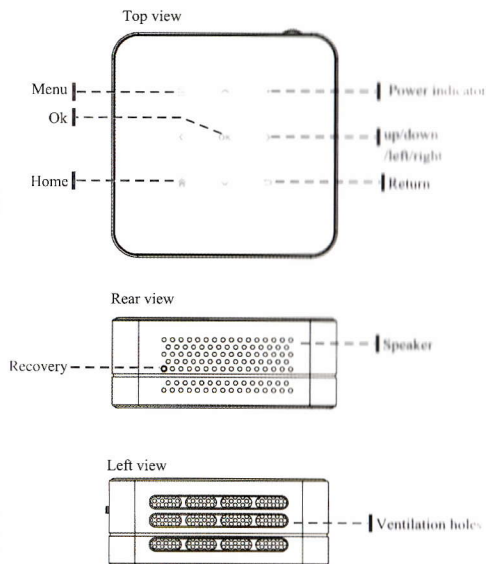

PRODUCT VIEW

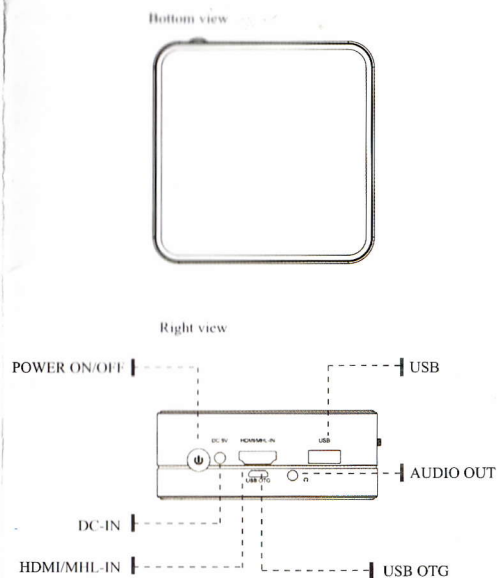

POWER ON/OFF/SLEEP




Power on: press and hold forward the “ Ψ ” key for 3 seconds, the product will get started.

Power Off/Sleep/Cancel: Press and hold forward “ Ψ ” key for 2 seconds, a window will pop up on the screen with 3 options: Power Off/Sleep/Cancel, choose the one you would like to do.

Wake up: When the product is in sleep mode, Press the “ Ψ ” key or move the connected mouse, the product will resume the working status before its sleep.

Mandatory power off: Press and hold “ Ψ ” key for 6 seconds, the product will be powered off automatically.

FOCUS ADJUSTMENT




After powering on the product, please adjust the focus slowly to achieve a clearest picture.

Remark: Optimized screen distance: 0.5m ~ 3m.

DATA TRANSMISSION

Connect USB, Mouse

Right view




Connect USB device.

Connect USB OTG connector.


Connect PC

1. When the product is powered on, connect the PC and projector by using USB cable; Click "Turn on USB storage".
2. Select: my computer—Pico, then you can start to transmit data between PC and the projector.

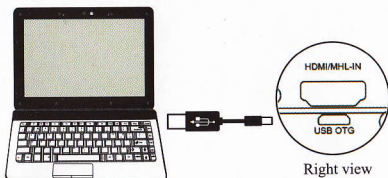

WIFI CONNECTION

1. Power on the projector, choose settings, then choose WIRELESS& NETWORKS.
2. Click OFF to ON status. Choose your desired net from the available hotspots, then input the router password.

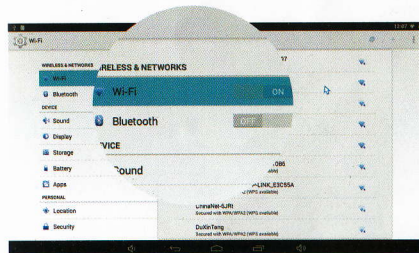

Remark:


- Before connecting Wi-Fi, please make sure there are WIFI connections hotspot exist.
- If your desired connection net is not displayed in the list, please re-scan or add manually.

MOBILE PHONE PROJECTION

Miracast (Android)

Set Samsung GT-N7100 as example

1. Choose the "App" in projector UI, click "MiracastReceiver", you can see your projector ID (pic 1).

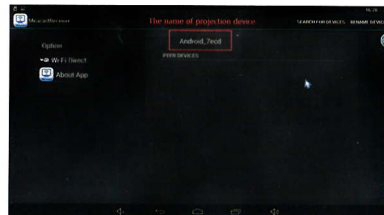


pic1


2. Open "Setting" in Samsung and click "Connection interface", find "Screen Mirroring" (pic 2, different phone model may have different name or location). Then it will pop up with "Searching matching device" (pic 3).
3. Select your projector through its IP. Then the projector will display the content in your smart phone (pic 4).

Remark: This function only applies to Android System above 4.2.

MOBILE PHONE PROJECTION



pic2



pic3



pic4

AirPlay (IOS device)

Set iPhone 5 as example


1. Connect your iPhone and the projector in a same WiFi router.
2. Choose the "App" in projector UI, enter "IOS Game". You can find your projector ID by entry of "IOS Game" -> "Assistant" -> "About".
3. Slide the IOS device screen from the bottom to up (pic 1), then choose "Airplay" (pic 2).

MOBILE PHONE PROJECTION

4. Choose your projector ID, open "Screen Mirroring", then the projector will display the content in your iPhone (pic 3).



pic1



pic2



pic3

WiPico

WiPico is a mobile phone app with multi mode to control, mouse steering, remote controller and touch screen. It can play videos, music, picture and office software in mobile phone.

MOBILE PHONE PROJECTION

1) Install WiPico on Smartphone

Scan the below two-dimension code to download "Wipico".




Android



iPhone


2) Connect WiPico (Set Android device as example)

1. Connect your smart phone and pico projector in the same WiFi router.
2. Set up "WiPico" in your smart phone, select the icon of . The system will popup available terminal device (pic 1).
3. Choose your projection device, press "Confirm" to connect (pic 2).

MOBILE PHONE PROJECTION

MOBILE PHONE PROJECTION

SAFETY CAUTION

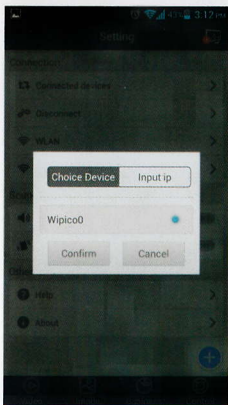


pic1



pic2



pic3

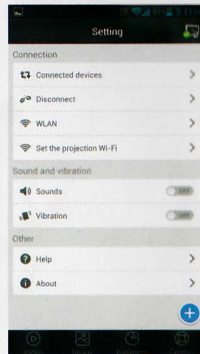

pic4

2. Select "Movie", "Picture" "Business" as seen in pic2, you can play corresponding content in your smart phone.
3. Press "Control" in pic 2, the control interface will appear.
4. Select "Setting" in pic3, you can set functions like "connected devices", "sounds" and "vibration" (pic4).

1. Do not put the working projector towards any person's or pet's eyes.
2. Do not expose the projector to direct sunlight, rain or any moisture.
3. Do not pack or store the product in a warm environment, such as an electric blanket etc.
4. Do not put the product on uneven surface or near any heat source such as a furnace, heating machine.
5. Do not block the ventilation holes, high temperature may cause power off.
6. Please be careful that the battery is kept away from the child.
7. If the product is dropped or is broken in shells, please turn off the power and contact the authorized dealer or the service center.

LI-ION RECHARGEABLE BATTERY SPEC:


NAME: LI-ION battery

SPECIFICATION: 3.7V 2600mAh

Please pay attention to the following:

- Please use the adapter provided by manufacturer.
- Do not disassemble the product by your self. Watch out the battery poles, do not cause short cut.
- Take care of the battery, and never put the battery into a fire, which might cause explosion.
- If you are going to use this product for a long time, you should charge battery to at least 70% of total capacity, and you should charge every month, this will help to prolong the battery life.

3) Use WiPico

1. Press the icon of  in pic 2, you will enter the screen of pic3. Then you can use mouse steering, touch screen or remote controller for control.