


Product illustration

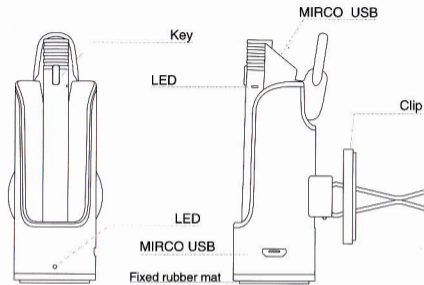

When the earphone and mobile device is connecting status, 20 minutes later the system default is automatically turned off to save electricity.

Product Specifications

- Bluetooth Version 4.1
- CSRBC8610 chipset
- Micro USB charging port
- Support HFP, HSP and A2DP
- Connect with two Bluetooth device
- Operating Range: Up to 30 feet (10 meters)
- 50mAh rechargeable battery
- Talk time: 4~6hours
- Music Play time: 4~6 hours
- Standby time: 150 hours
- Charging time: about 1~2 hours
- iPhone battery indication
- CVC echo and noise cancellation
- Support voice prompt for MMI:
- Power on/paring/connecting/battery low/Power off

BASIC OPERATIONS

Turning the headset on/off

1.To turn the headset on
Press and hold Button key for 3 seconds, the white indicator of the headset will flash 1 second and you will hear a voice "Power on" then the headset is turned on.

2.To turn the headset off
Press and hold Button key for 3 seconds, the white indicator of the headset will turn off, and you will hear a voice "Power off", then the headset is turned off.

3.When you hear a voice "Battery Low", please charge the headset.

Charging

Connect the USB port of the headset with the charger or computer by USB cable. When charging, the indicator of the headset will turn white, when full charged, the indicator will turn off.

Pairing

Before using your headset for the first time, you must pair it with your Bluetooth enabled phone.

1. Ensure that the headset is off (see "To turn the headset off" section). And the mobile phone Bluetooth setting is activated.
2. Press and hold Button key for about 5 seconds until the indicator light flashes white all the time and you will hear a voice "pairing", now the headset is under pairing mode.

3. Set your Bluetooth phone to discover the headset by following your phone's guide. Typically, the steps involve going to a 'Setup', 'Connect', or 'Bluetooth' menu on your phone and then selecting the option to discover Bluetooth devices.
4. Your phone will find the "V28" headset and press "V28" on the mobile phone, you will hear a voice "connecting", and then your headset is connected with your mobile phone.
5. If your mobile phone is below version 2.1, then you need to enter password "0000"

IMPORTANT: If the pairing can't be completed within 90 seconds while the pairing mode is activated, which means the pairing is unsuccessful, please repeat Step 1 to Step 5 to pair the headset with the mobile phone again.
Pairing Your Headset with Two Mobile Phones (Multipoint connecting)

V28 supports a Multipoint function to allow simultaneous pairing of the headset with two mobile phones.

1. Follow the pairing procedure as instructed in "Pairing" section to pair the headset with the first mobile phone.
2. Turn off the headset and turn off first mobile Bluetooth function.
3. Repeat the same pairing procedure on the second mobile phone.
4. On the first mobile phone's menu, activate its Bluetooth connection with the headset.

Volume Control

This machine is a key type design ,the volume control only through mobile terminal operation.

Play/Pause

During music, press Button key once to play the music and press Button key once again to stop the music

Next/Previous Song

This machine is a key type design ,next and previous operation through mobile terminal operation

Voice Dialing

Please ensure your mobile phone support voice dialing function

This machine is a key type design ,voice dialing operation through mobile terminal operation

Ending a call

Shortly press Button key once to end the call

iPhone Battery Indication

It will display the battery of the headset on the upper right of iPhone which you can check the battery of the headset and confirm when you need to charge your headset.

Answering a call

Connected with one mobile phone:

- 1.In power on status ,press button key once to answer the call
- 2.In power off status ,press button key once , the earphone will automatically connect with mobile and receive the call

Connected with two mobile phones:

- 1.Press Button key once to receive the second call but keep the first call when there is a call on the first mobile phone and there is another call coming from the second mobile phone.
- 2.Press Button key twice to transfer the two calls

Last number redialing

Connected with one mobile phone: Press Button key twice to make the last number redial

Note: Depend on your phone type, the actual operation may vary.

Rejecting an incoming call

Press and hold Button key for 2 seconds to reject a call.