

Product specifications:

1. MTK6260+ G-SENSOR internal storage 32+32
 2. BT 2.1&3.0; Partner with Bluetooth
 3. LCD: 0.49 OLED 64*32 Dots
 4. battery capacity 180mA Standby 180hour
 5. Built in 7 languages, English law the Tai Po
- "stand-by time: The theory of non connected standby (into the automatic shutdown): For more than 1 months; Connect the standby: seventy-two hours The above cell types: Polymer lithium ion battery"

1. Language version

"support Traditional Chinese ; Simplified Chinese ; English ; Korean ; Russian ; Spanish ; French ; German ; Italian ;

Portuguese ; Arabic And other languages. "

2. charge

Built in rechargeable lithium ion polymer battery, Before using charging more than 3 hours.

3. Switch machine

Switch the press the B button 3 seconds for the switch machine;
 Boot screen English WELCOME;
 Off screen English GOODBYE
 Charging line end is connected with the USB interface rechargeable device. The other end is inserted into the charging port. OLED The display will be charging identifier.

4. Bluetooth pairing

To complete the mobile phone and mobile phone for the first time using paired partner:
 "Long press the B key to enter the function mold, Short press B key to switch to the Bluetooth, Long press, Activate Bluetooth on, The machine can be found on"
 Mobile phone set to open in the Bluetooth function;
 Enter the mobile phone Bluetooth interface selected "Search equipment and click "OK" ; Mobile phone screen is the Bluetooth device name "DFyou" ,And confirm the connection:
 Some mobile phone password input interface, enter the four digit code (0000) and press "ok";
 Press the A key will wake up the LED screen display clock:

5. Calls, caller ID

DFyou And the pairing is successful in Unicom mobile phone shape,
 DFyou The mobile phone calls will continue vibrating alert;
 DFyou The mobile phone shows the caller number;
 Long press the B key to directly answer the mobile phone
 If not convenient to answer the call can be short press A key to cut us;
 The effective distance remind indoors or under complex environment will be shortened;

6. Bluetooth notification APK Download, Please sweep the mobile phone to download and install



APK download:

7. Remote camera. In the case of APK connections, Long press B button, enter the menu. Press the B button, switch to the remote camera. Long press to enter, mobile phone will automatically start camera, short press will take pictures

8. Looking for mobile phone. In the case of APK connections, long press B button, enter the menu. Press the B button, switch to find mobile phone, Long press to enter, mobile phone's alarm

9. Remote anti-theft, when the mobile phone away from you for more than 10M, Or mobile phone shutdown, bracelet will send out alarm sound.

10. Remote synchronization, when the APP connection open case, The QQ mobile phone, Micro message, information will be reminded of the bracelet.

11. Pedometer function, press the B button, enter the menu, Press the B button, switch to the pedometer, Long press enter, you can step, Shown above is the time, shown below is the number of steps, Data is transmitted to the installation Analysis in the mobile phone client. The data analysis, to determine whether the amount of exercise every day, To remind you to arrange exercise.


12. Sleep management, long press the confirm button, enter the menu, Press the B button, switch to sleep management, long press to start recording, Analysis of the data is transmitted to the installation in the mobile phone client, and gives the data analysis, To determine whether a reasonable night sleep.

APP download address:



How to set up correct OSD language.


1: Choose “设置” and Press 3 seconds “OK” to confirm it,

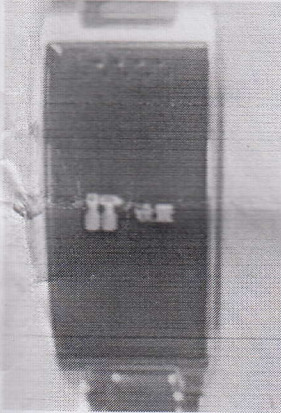

2: you will find “语言设置”, please press 3 seconds “ok ” to confirm it.



3: you will find Chinese words “语言简体中文” and Press 3 seconds “OK” to confirm it.

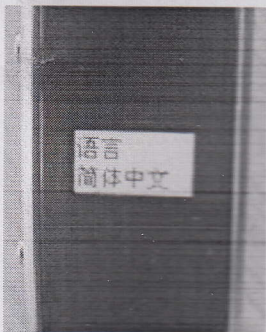

4: Select “English” and Press “OK” 3 seconds to confirm it to finish OSD languages settings.

