




GEEGA S204 BLUETOOTH SPEAKER

FEATURES

- Bluetooth 4.0+EDR
- 3.5mm music line-in function
- Aptx audio technology
- Support connecting with 2 phones devices
- IOS show the headphone battery power status

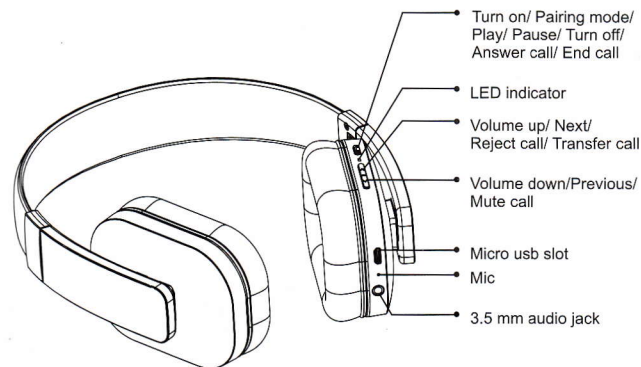

GENERAL FUNCTION

OPERATION	LED status
POWER ON	Blue led flashes 2 times
POWER OFF	Red led flashes 2 times
PAIRING	Red led & Blue LED flash es alternately
STANDBY	Blue led flashes 3 times in 5 seconds
INCOMING CALL	Blue led flashes continuous
LOW BATTERY	Red led flashes 2 times every 2 seconds
CHARGING	Red led keep lighting during charging Blue led flashes once charging finished

BASIC BUTTONS OPERATION

Power on: Press multifunction button for 2 seconds. Blue LED flashes 2 times headphone turn on.

Power off: Press multifunction button for 3 seconds. Red LED turn off after flashes 2 times. Headphone turn off.

Volume adjust: Each press on 'Volume up' or 'Volume down' buttons, one level voice volume changes. When volume reaches to Max or Minimum, "Tick" reminding voice occurs.

Play/Pause: Short press multifunction button, music pause. Press it again, music continues.

Previous: In standby status, Long press 2 seconds 'volume down' button, music turns to previous one.

Next: In standby status, Long press 2 seconds 'Volume up', music turns to next one.

Answer Call: Short press multifunction button to answer the phone call.

End call: Short press multifunction button, phone call ended.

Reject call: Press 'Volume up' button for 2 seconds to reject a call.

Transfer call: During the calling, press 'Volume up' button for 2 seconds, which call switches to mobile phone. Press 'Volume up' button for 2 seconds again, then call switches to headphone.

Last number redial: In standby status, press headphone multifunction button twice to redial the last number continuously.

Call Mute function: Press 'Volume down' button for 2 seconds, call mute. will take effect. Press 'Volume down' button for 2 seconds again, cancel the call mute.

Battery Capacity status: When headphone connects to IOS devices, IOS devices show the headphone battery power status on the upper right corner.

Charging: New headphone has enough power for pairing and dialing out for several times. When in low battery, please charging via USB cable for 2 hours. Red LED keep lighting during charging, blue LED keep lighting when charging finished.

Reset Mode: Connect the headphone with computer via Micro USB cable. When red LED light flashes, headphone reset finished.


3.5mm music line-in function: Connect Audio line in cable to 3.5 audio jack for wired music.

Phone call function cannot be used in this mode.

The headphone is on or off status

· Connect the 3.5 audio wire to the headphone and audio player.

· You can adjust volume bottom of the audio player or the mobile phone to reach right volume to listen music.

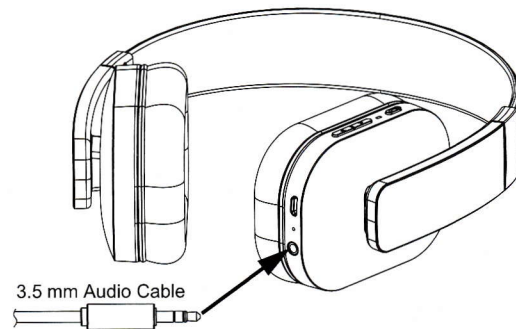

PAIRING

(The headphone supports connecting 2 phone devices)

Pairing with one phone or other device

Make sure the headphone is power off. Press and hold the multifunctional button for 5 seconds to enter into the pairing mode. Red led & blue led flashes alternately, Please activate Bluetooth function of your phone or device for searching headphone. From the list of found devices on your mobile phone , select the headphone "GEEGA S204" to connect it. Follow the instruction to enter "0000" as PIN if the mobile phone reminder to enter. Headphone or device can be used to music from your phone or dial phone call etc.

Pairing with two phones or other devices at the same time

This headphone can support 2 devices multi-connection. It can pair with two mobile phones simultaneously, calling with one of them . After completing pairing with the first phone, turns off the headphone, then re-do the pairing procedure with another phone. Once finished the pairing, restart the headphone, it will automatically connect to the Phone or device of Last connected , and short press the two key of "volume +" and "volume -" simultaneously ,which can enable the multipoint connect function, from the list of found devices on another mobile phone, select the headphone "GEEGA S204" to connect it.

Sound quality with aptx code

Featuring the apt-X codec, the headsets can connect wirelessly to any apt-x enabled devices, vastly improves the quality of Bluetooth streaming, delivering CD-quality sound.

SPECIFICATION

Bluetooth version: 4.0

Talk time: 14h

Stand-by time: 540h

Music play time: 14h

Wireless range: 10m

Bluetooth profiles: A2DP/ AVRCP/ HSP /HFP

Impedance: 32Ω

Sound pressure level: 118±3dB

Frequency Response: 20Hz---20 KHz

Weight: 255.5g

Dimension: 200x180x65 mm

PACKING CONTENT

(STANDARD ACCESSORIES)



GEEGA S204



USB CABLE



USER MANUAL



3.5MM AUDIO WIRE