CVKD-C33 bluetooth headset designs gracefully and is easy to use and carry. It may be used in any situation wherever it need individual language communication, and make the people more free. CVKD-C33 may freely wear and use in 10 meters, conforming to bluetooth technology standard V2.0. Its succinct and novel design causes it to work in the work and in the life perfectly. People use it to deal with any calls and has liberated user both hands.

Please take out all the parts from the package:

(A) CVKD-C33 Bluetooth Headset
(B) Microphone with extension cable – 1PC
(C) Mini microphone – 1PC
(D) User Manual

Standard	Bluetooth V2.0
Operation Range	10 meters (33 feet)
Audio Code	15 bits resolution, S/N > 60DB
Frequency	2.4 GHZ-2, 4835 GHZ ISM Band
Dimension	(L)63 mm (W) 47 mm (H) 58 mm
Connection	Point-to-point
Weight	90g
Output power	0 dBm (class II)
Security	128 bits encryption
Power Consumption	17 mA working, 500uA standby
Operating Temperature	-10 – 55
Storage Temperature	-20 – 60
Certification	CE, FCC
Headset Passkey	0000

CVKD-C33 Bluetooth Headset

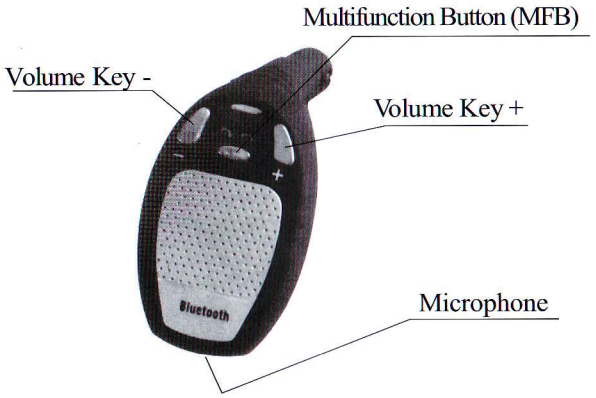

CVKD-C33 Bluetooth In Car Hands Free Kit

1.This BT Car Kit provided with 2 microphones (one mini microphone and another one with the extension cable)

2.The purpose of microphone with extension cable is not only to get the best voice single but also to provide the convenience to talk for people on the back seats.

3.The purpose of mini microphone makes the Bluetooth wireless technology more enjoyable.

"Paring" means to create a link between bluetooth handsfree and bluetooth mobile phone.You should pair CVKD-C33 headset with your mobile phone before using it. And you only can use the paired mobile phone once paired. If you want to make it work with other different mobile phone, you need to pair it with the other new mobile phone. Thus the headset will not work with the previous paired phone at the same time.

Paring the Headset

1. Turn off the headset, then press the MFB button for 5 seconds until you see the LED light in blue color and hear the pairing beep.
2. Release the MFB button, headset is on the pairing mode.
3. Turn on the mobile phone, and keep it within 10 meters away from the headset.
4. Search the bluetooth headset, please refer to the phone's user's guide.
5. When prompted by the phone, please enter the passkey 0000. Paring is successful when the headset indicator LED flashes blue color every 3 seconds.
   And now the headset standby mode is ready for any call dialing or coming.

Canceling Paring Mode

When you are using the paring mode, you can cancel the paring mode and turn off the headset according the following step:

Press the MFB button for 3 seconds until the two LED lights are out. Meanwhile, you can hear the turning off beep.

Put the CVKD-C33 Headset in a Proper Place

Put the CVKD-C33 headset in a proper place and find the best angle, making the microphone face to the mouth.The best talking distance is 30+/-5cm. If you feel the voice too low or too loud, please try to adjust the volume key+ or Key -.

Turning on/off Headset CVKD-C33

Turning on the Headset

1. Press the Multifunction Button for 4 seconds till you hear the connecting tone. The headset will set standby mode for making or answering a call.
2. The headset will automatically have the search function one it in open mode.

Turning off the Headset

With the headset turning on, press the Multifunction Button for 4 seconds till you hear the turning off tone. The headset will turn off.

Making a Call

You can make a call from your mobile phone or directly use the voice activation function from your headset CVKD-C33 (If your mobile phone can support this function)

Making a Call from Mobile Phone

1. When you make a call from mobile phone, it will automatically connect with the headset.
2. Make a Voice Dial Call: (if your mobile phone can support this function)

(1) Press the Multifunction Button

(2) Speak out the name you want to call, and then the call will automatically connect with the headset.

3. Answering a Call

(1) You must set your mobile phone immediately response to your headset. Please refer to the mobile phone user manuals to see how to start this function.

(2) When a call is coming, press the Multifunction Button, and it will automatically connect with the headset.

4. Ending a Call

Transferring a Call

You can transfer a call from headset to mobile phone or from mobile phone to headset. (If the mobile phone can support this transfer function)

Under the talking mode of headset, you can transfer the call from mobile phone by pressing the Multifunction Button for 3 seconds.

When a call comes into your mobile phone, press the Multifunction Button to answer the call.

Adjusting Headset Volume

Increase speaker volume

To increase speaker volume, gradually press volume key "+ " until you reach the desired volume level.

Decrease speaker volume

To decrease speaker volume, gradually press volume button " - " until you reach the desired volume level.

CVKD-C33 Headset in Mute Mode

You can set your microphone mute or not to make your contacted person hear the voice.

Headset Set Mute Mode

Press the volume keys for 3 seconds.

Headset does not set Mute Status

With the microphone set mute mode, press the volume button for 3 seconds.

Visible and Audible Indication

Two LED (Blue) indicate the status of Headset

Status	Indication
Low Battery	Blue LED Flash and continue the alarm voice
Turn off Headset	LED light turn out
Headset in the Standby Mode for Dialing or Answering a Call	Blue LED Flashes in Every 3 Seconds
Headset in Pairing Mode	Blue LED Flash

Audible Indication

Volume	Indication
Turn on	Headset has turned on
Turn off	Headset will turn off
Paring	Headset has set pairing mode