


## User's manual

### Stereo Headset

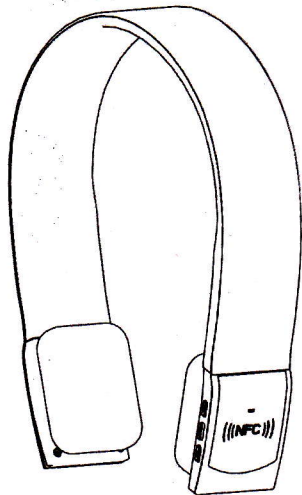

## SPECIFICATIONS

Model NO.		Ver.	V3.0+EDR
Bluetooth Profiles	HSP,HFP,A2DP,AVRCP	Effective Range	10Meters
Music Time	10 Hours	Talk Time	11Hours
Standby Time	Up to 250 Hours	Iuput	DC : 5V/180mAh
Charge Time	3 Hour	Dimensions	14.5*10*6CM

### About

is a stereo headset with Bluetooth technology. It supports the following profiles:


HSP — Headset Profile

HFP — Hands-free Profile

A2DP — Advanced Audio Distribution Profile

AVRCP — Audio/Video Remote Control Profile

### Overview

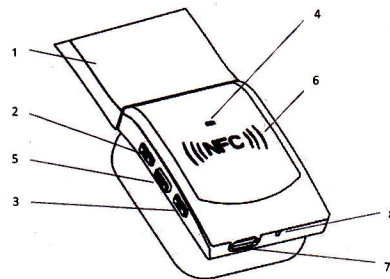

1	Retractable string	2	last song&volume up
3	next song&volume down	4	LED Indicator
5	Multifunction button (MFB): answer, end and reject call, pause and play		
6	NFC Area	7	Charging port

### Charging the battery with USB cable

- Step1: Insert USB charging cable into USB port of PC.
- Step2: Connect charging cable with the charging port of headset.
- When the red light is on, the headset is charging.
- When the blue light is on, the headset is charged fully.
- It takes about 3 hours to charge the headset fully.

### Warning:

- The battery is rechargeable.
- First time charging : Before you use this headset, please charge the battery of headset fully

### How to use

#### A Switching on / off headset

Function	Operation	LED Indicator	Voice prompts
Switch on	Press and hold the MFB for 3 seconds	Blue LED is on for 1 second	"Power on"
Switch off	Press and hold the MFB for 6 seconds	Red LED is on for 1 second	"Power off"

#### B Pairing the headset with devices

##### A) How to enter pairing mode

Be sure [REDACTED] in power off status first. Press and hold the MFB for 6 seconds, till Red and blue Led blink alternately, or you hear the indication "Pairing". And then release the MFB. The unit will become pairing mode.

##### B) Pairing the headset with mobile phone

Please make sure your mobile phone has function that can be used.

Specific pairing procedures were not the same with different mobile phone. Please refer to your mobile phone manual for further information. Steps as follows:

- Please keep the headset and mobile phone in the range of 1 meter when pairing.
- Start the function of mobile phone and search the devices.
- Make the headset enter into pairing mode (Please refer to "how to enter into pairing mode").

After searched, select [REDACTED] in the device list.

- According to indication, enter password or PIN No:"0000", and press the key of "Yes" or "confirmed".
- After successful pairing, select [REDACTED] in the device list, and press "connect".
- After successful connecting, the blue LED of the headset quickly blinks twice or three times every 4 seconds.

### Notes:

[REDACTED] can connected two device at the same time .If you want two Mobile phone connected with [REDACTED] at the same times.

A)Make the headset enter into pairing mode.

B)Make two Mobile phone pairing with [REDACTED] simultaneously.

#### C) Near Field communication (NFC)


If your mobile phone has built-in NFC , it will help your mobile phone connect and disconnect [REDACTED] easily.

- Be sure [REDACTED] in "power on" status
- Put the phone into the connection area on [REDACTED] they will be connected within seconds.
- If you want to disconnect, just put the mobile phone into the connection area again.

### Wearing the headset

The string of this headset is retractable, please adjust according to the actual use. Logo "L" of headset represents left ear, Logo "R" of headset represents right ear. Please wear the headset according to the indication of the Logo.

headset by using the conversation switch button or through operating on the mobile phone. Please refer to the instruction of your mobile phone for further information



### Making calls with the headset

Function	Status of headset	Operation
Voice dial	Standby mode	Press and hold MFB for 2s, release it till hearing indication sound
Redial last number	Standby mode	Short press MFB twice quickly
Volume up	Conversation mode	Short press or long press + key. When the volume is adjusted to max, you will hear an indication tone.
Volume down	Conversation mode	Short press or long press - key. When the volume is adjusted to min, you will hear an indication tone.
Answer calling	Ringing	Short press MFB
Reject calling	Ringing	Press and hold MFB for 1s, and release it till hearing indication sound

**Warning:** Excessive pressure from headphones can cause hearing loss.

#### Notes:

- For some mobile phones, when you press the key of accepting on the phone, the conversation will be sent to the mobile phone. At this time, you can switch the call to

### Playing music

When the headset connects with the mobile phone or transmitter which supports A2DP, you can enjoy music through headset wirelessly.

Function	Status of headset	Operation
Pause	Playing music	Short press MFB
Play	Pausing	Short press MFB
Last song	Playing music	Short press < key
Next song	Playing music	Short press > key
Volume up	Playing music	Short or long press + key. When the volume is adjusted to max, you will hear an indication tone.
Volume down	Playing music	Short or long press - key. When the volume is adjusted to min, you will hear an indication tone.

#### Notes:

- Remote control the function of last song/next song/pause, it needs your mobile phone or Bluetooth transmitter supports AVRCP. Please refer to the instruction of your mobile phone or transmitter. for further information.

### LED indicator

#### A) Charging

LED indicator	Status of the headset
Red LED is on	Charging
Blue LED is on	Finish charging

B) In use.

LED Indicator	Status of the headset
Red and blue LEDs blink alternately	Pairing mode
Blue LED quickly blinks once every 2 seconds.	Not connected to a device
Blue LED gradually turns on and off	Conversation mode
Red LED blinks twice every 20 seconds	Low power

### G Re-connecting to a Bluetooth device

#### A) Automatic connecting

Every time the headset is switched on, it will connect to the nearest, and the last connected device automatically.

#### B) Manual connecting to last connected device

When the headset is in standby mode and doesn't connect to any devices, short press MFB button once, it will connect to last connected device automatically.

### Battery status indication

Battery status indication Support IOS /Android(Optional)