

VNETPHONE

Bluetooth helmet intercom




BT Interphone _v5

User Manual

Key spec.

Full duplex motorcycle intercom among five riders at the same time Up to 1,200m bluetooth distance, Auto-receiving mobile phone calls, National level 5 waterproof standard, MP3/GPS/mobile Up to, 8 hours talk time, FM radio function



1. On
2. Off
3. Volume up
4. Volume down
5. FM radio/Rider A mode
6. Rider B mode
7. Earphone/Charge plug
8. Deck



Installation instruction



First, install the clamp on the helmet



Buckle V5 on the clamp in the direction indicated in the picture



Install the earphone and microphone



V5 after installation as shown in the picture above



Earphone plug-in schematic




Portable clothes clamp



Turn on: hold the button for about 2 seconds, then the red light goes on, release when the blue light flashes. It enters into on mode.



Phone pairing Schematic



Pairing with cell phone/mp3/gps devices. Directly long press the button for 3-5 seconds. Red and blue lights flashing alternately. Turn the cell phone/mp3/gps Bluetooth on, search for Bluetooth devices, the device name displayed on the cell phone: V5, and then click pairing. Red light off, blue lights flashing rhythmically. Pairing success.

FM radio function: connect the earphone after turning on, press the mode A button for 3 seconds to turn on the radio function. Listen to your favorite radio station.



Two V5 pairing. Two V5 simultaneously in on mode, long-press A button together for 5-7 seconds. To enter into red and blue lights flashing alternately mode, and then press the A button of either V5. The device's red light goes off, blue lights flashes, and it starts to search for the pairing state. About 5-7 seconds later, another v5 red light goes off, blue lights flashes. It means that two devices are pairing successfully. Then after a short-press on either A button, you can enter talkback status.




Red and blue lights in flashing mode


- Step 1: unit ① and unit ② as a group to do mode A pairing, unit ③ and unit ④ as a group to do mode A pairing.
 Step 2: Select unit ② and unit ③ to do mode B pairing. Long-press mode B button. After about 3-5 seconds, two devices enter into alternately flashing red and blue state, and then click unit ② / ③ mode B button, the device's red light goes off, blue lights flashes, it starts to enter into search for pairing state. Approximately after 5-7 seconds, the red light goes off, blue lights flashes. It means that two devices are pairing successfully. Then press the mode B button of unit ② / ③ to complete the bridge function mode.
 Step 3: press mode A button of unit ① and ④ to finish pairing of four devices and enter into talkback state.
 Step 4: Select unit ④ and ⑤ for pairing, long-press mode B button of unit ④, long-press mode A button of unit ⑤, after about 3-5 seconds, the two devices enter into state of red and blue alternately flash, and then press the mode B button of unit ④ (mode A button of unit ⑤), the device's red light goes off, blue lights flashes, it starts to search for the pairing state. Approximately 5-7 seconds later, the red light goes off, the blue lights flashes. It means that two devices are pairing successfully. Press the mode B button of unit ④ (mode A button of unit ⑤), you can enter into five devices Intercom state.

(PS method to cancel five devices pairing: press mode A and mode B buttons simultaneously for about 3 seconds, the red light flashes, the pairing will be canceled)


V5 pairing Schematic

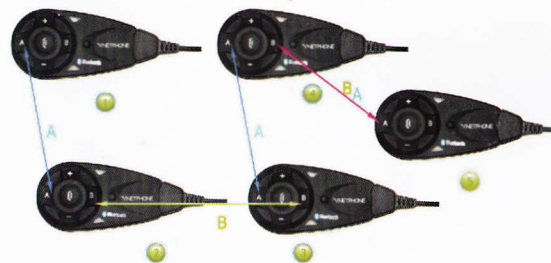


Packing Accessories




USB charging cable



Deck, installation screwdriver, connector



Earphone



AC & USB charging device