


cannice

STEREO WIRELESS
TALKING PEN




OPERATING
INSTRUCTION

Padblue2

TECHNICAL PARAMETERS

Talk time: 5hours
Play music: 5hours
Standby time: 180hours
Bluetooth version: V2.1+EDR
Bluetooth protocols: A2DP/HFP/HSP/AVRCP
Solution: CSR
Noise reduction: CVC noise reduction
Wireless range: 10m

SCHEMATIC DIAGRAM

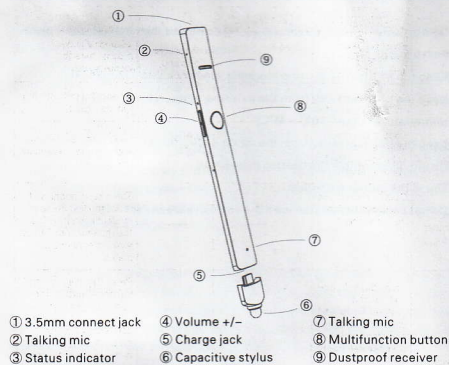

※ Make sure you have read the operating instruction manual and security announcements to ensure the proper use of the bluetooth headset. It's strongly recommend that this user manual should be kept properly for future reference. The pictures in the manual only used for description, the real product might be different from it in the pictures.

CHARGING

The Padblue1 comes with the chargeable battery that can't be disassembled inside. Make sure the headset is fully charged before first time using.

- 1 Use the AC charger to connect with the charge jack.
- 2 plug the AC charger into the power socket. red indicator flashes white charging.
- 3 The red indicator change to blue after fully charged, then pull out the AC charger from the power socket.

※ Please don't plug in and pull out the AC charger frequently while charging, to avoid the shortening life time of the bluetooth headset

TURN ON OR TURN OFF THE HEADSET

※ Ensure there is enough power before using the bluetooth headset.

1. How to turn on the bluetooth headset?

While the headset is in turned-off status, long press the multifunction button for about 4 seconds, the blue indicator flashes 4 times along with the voice prompt 'Thank you for choosing Cannice products', after this the bluetooth headset is turned on and will be in standby status.

2. How to turn off the bluetooth headset?

While the headset is in turned-on status, long press the multifunction button for about 4 seconds, the red indicator flashes 1 time along with the voice prompt 'Thank you for using Cannice products', after this the bluetooth headset is turned off and will be in turned-off status.

PAIR AND CONNECT TO THE BLUETOOTH HEADSET

Pairing program allows the encrypted wireless connection between the 2 bluetooth devices and begin to communicate with each other, please make sure the operating range of the 2 bluetooth devices within 20 meters before pairing.

How to pair?

- Long press the multifunction button for about 7 seconds till the red and blue indicators start flashing alternately, the bluetooth headset will be paired successfully, the headset will be searchable within 2 minutes.
- Enable the mobile phone bluetooth function and search for the bluetooth headset (please refer to the mobile phone user manual)
- Select the bluetooth headset displayed as Padblue2 among the bluetooth device list.
- Please input 0000 to finish pairing if bluetooth PIN code is required.

※ No need to input the PIN code if the device support fast pairing function.

BASIC OPERATION

Function	Operation	LED status	Alerts	Explanation
Receive a call	Short press any key to answer the call (about 1 second)	Blue	With continuous alerts and vibration alert	With continuous prompt tone for incoming call
End a call	Short press the multifunction button	---	---	Or end the call with the mobile device
Reject a call	Long press the volume+ or volume- button for about 2 seconds	---	With beep alerts	Long press the volume+ or volume- button to reject a call
Last number redial	Double short press the multifunction button within 1 second	---	---	The mobile phone will redial the last number by double short press the multifunction button while in connected status
Voice dial	Press the volume+ and volume- buttons for about 1 second simultaneously then release them	---	---	Press the volume+ and volume- buttons for about 1 second simultaneously under connected standby status, then speak the name that correspond to the number in the contact list (mobile phone voice dial function support is required, please refer to the mobile phone user manual).

Call transferred to mobile phones or tablet	Long press the volume- button for 2 seconds	---	---	Long press the volume- button for about 2 seconds to transfer the call to the mobile phone and disconnect with the current bluetooth headset, the headset will be connected with the mobile phone again automatically after ending up the call.
Mute mode/ disable mute mode	Long press the volume+ button for about 2 seconds	---	---	Long press the volume+ button about 2 seconds to switch off the headset microphone, the person on the other end of the line can't hear the voice then
Volume up	Short press the volume+ button	---	---	Short press the volume+ button to increase the volume step by step, until the maximum volume limit with the beep indication
Volume down	Short press the volume- button	---	---	Short press the volume- button to decrease the volume step by step, until the minimum volume limit with the beep indication
Previous song	Long press the volume- button for about 2 seconds	---	---	Long press the volume- button for about 2 seconds to play previous song while music playing (available for some music players)
Next song	Long press the volume+ button for about 2 seconds	---	---	Long press the volume+ button for about 2 seconds to play next song while music playing (available for some music players)

Music pause/play	Short press the multifunction button for about 1 second	—	—	The music will pause after short press the multifunction button for 1 second,press again to play the music again (available for some music players)
Headset hardware reset	Press the multifunction button still and plug in the adapter when the headset is turned on	—	—	Press the multifunction button still and plug in the adapter when the headset is turned on
Battery low alerts	—	The red indicator flashes in every 8 seconds	With beep alerts in every 30 seconds	If the battery voltage is lower than 3.3V, the red indicator and alert tone will remind you to charge the headset
Delete paired devices list	Wait for about 4 seconds after pressing the volume+ and volume- button simultaneously and plug in the adapter when the headset is turned off	The blue indicator flashes for 3 times	—	The paired devices list will be deleted
Auto pairing	Press the multifunction button for 4 seconds when the Bluetooth headset is off	The blue indicator flashes continuously for 4 times	With beep alerts	Press the multifunction button for 4 seconds then release when the Bluetooth headsets off, it can be auto pairing with the last connected device.
Automatically turn off when in unconnected status for long time	—	—	—	The headset will be turned off automatically after unconnected for 3 minutes

FAQ & SOLUTIONS

Q: Can the bluetooth headset be connected with the laptop,PC or PDA?

A: The device that support the bluetooth version and function can be connected with the headset.

Notes: Please refer to the user manual of the laptop,PC and PDA devices.

Q: What devices will affect the quality of calls?

A: The quality of calls may be affected by the wireless devices, electrostatic noise will occurs commonly,please keep the bluetooth headset away from the radio waves electrical appliances,in order to prevent interference

Notes: Please be aware of the position of the devices making radio waves during phone calls with bluetooth headset.

Q: Will my phone conversation be listened by other bluetooth mobile phones?

A: The radio-frequency power of bluetooth is far lower than regular mobile phone signal power,so the bluetooth signal is hard to be monitored by the third party device. Because after bluetooth headset connected with the mobile phone,a secure connecting will be built between the headset and the device.

Q: How should I clean my bluetooth headset?

A: Please use dry and soft cloth to clean it.

Notes: Please keep the cloth dry and soft.

Q: The bluetooth headset can't be power on..

A: 1)the battery is empty.

2)the power on button press itn't long enough

Solution: 1)Charge the bluetooth headset with the charger.

2)Long press the multifunction button for about 4 secs

Notes: 1)Charge the bluetooth headset for more than 2 hours.

2)Press the multifunction button till the red and blue indicator flashes alternately.

Q: The bluetooth headset can't be power off.

A: The bluetooth headset program errors occur by the incorrect operation.

Solution: Please refer to the step 'headset hardware reset' in 'basic operation'

Notes: Make sure the charging time not too long.

Q: The bluetooth headset can not be searched.

A: 1)Check if the bluetooth headset is power on, and searchable;

2)Errors with the device bluetooth program;

3)Check if the bluetooth headset near the radio wave devices.

Solution: 1)Please refer to 'Turn on or Turn off the headset' description to reboot the headset;

2)Do not operate other programs when searching and connecting the bluetooth headset with the mobile phone;

3)Keep the bluetooth headset and devices away from other radio waves electrical devices.

Notes:1)Please be aware that the headset will turns into standby mode after 2 minutes if it doesn't pair with any devices when the bluetooth headset is switched on.

2)Please reboot the mobile phone and search again.

3)Please be aware that radio waves electrical devices may affect the operation.

Q: Some of the function described in user manual are not available.
A: Different connected devices have different functions. For instance, when the bluetooth headset connected with PDA, and MP4 and other devices. If the headset is multipointed, some functions may be unavailable.

Q: When I clip the headset on the clothes, the voice would be weak to the other end point.

A: the headset position is too far from the voice source.

Solution: Make sure the headset distance from mouth within 30 cm.

BATTERY INFORMATION

1. The electricity of the Bluetooth headset is provided by the inner battery.

Do not connect the headset with the charger if unnecessary or fully charged.

Overcharge will shorten the battery life. the headset power will release automatically after fully charged with or without using. Do not put the headset in the place where the temperature is too high or too low. For instance, leave the headset in a locked car in summer. That will shorten its capacity and life.

※ 1. Keep the battery temperature between 15°C and 25°C otherwise too hot or too cold may affect its performance. Do not throw it to fire to avoid explosion. Please recycle the invalid batteries correctly.

NOTES & TIPS

- Do not throw, impact, scrape, screw, hit or vibrate the headset, don't place heavy things on it.
- Keep the headset away from magnets, electronics and loudspeaker.
- Keep the headset away from the extreme temperature (working temperature range -10°C ~ 45°C).
- Keep the headset away from the moist environment.
- Do not disassemble the bluetooth headset.
- Touch the button smoothly.
- Do not clean your headset with the corrosive cleanser.